




Cyanlite™

VISTRA

Frameless

Suspended

LED Linear Light





VISTRA – Frameless Suspended LED Linear Light

Cyanlite



Overview

The VISTRA series features an elegant frameless minimalist profile engineered for modern commercial office environments. Boasting a slim 40mm housing height, standard dimensions include widths of 100mm, 150mm, 200mm and lengths of 1200mm & 1500mm, with custom length and width options available upon project demand.

This frameless linear luminaire delivers consistent, homogeneous light output with superior glare control, achieving UGR<19 to deliver comfortable visual experience for long-hour office work.


The innovative all-in-one suspension design integrates suspension cables and power wiring, greatly simplifying on-site installation and shortening construction time. Equipped with DIP switch function, users can easily adjust power levels and lumen output on-site to match varied lighting requirements.

Backed by a 5-year manufacturer warranty, VISTRA is a flexible, high-performance lighting solution for open-plan offices, boardrooms, management offices and premium commercial spaces.


Model	Part No.	Ra	CCT	Power Switchable	Lumen Switchable	Size	Beam
100x1200	PB30W112P-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	100x1200x40mm	90°/120°
150x1200	PB30W112S-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	150x1200x40mm	90°/120°
200x1200	PB30W212P-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	200x1200x40mm	90°/120°
100x1500	PB40W115P-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	100x1500x40mm	90°/120°
150x1500	PB40W115S-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	150x1500x40mm	90°/120°
200x1500	PB40W215P-FR-VS	>80	3000/4000K	30/35/40W	3750/4375/5000 lm	200x1500x40mm	90°/120°

*The other customized specifications are welcome.

Photometric

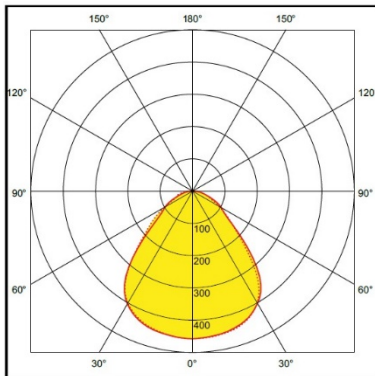

- 90° beam UGR19 with Micro Prismatic Diffuser




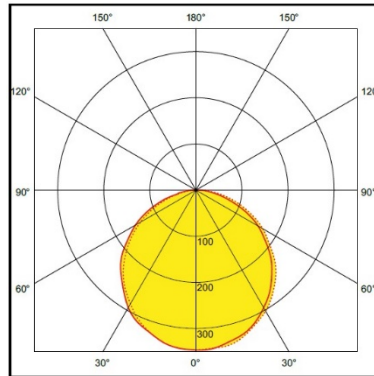


- 120° beam UGR22 with Opalic Diffuser

Efficacy	125lm/W @ 4000K Ra80;
CRI (Ra)	>80; (optional >90)
Color Temp.	3000K/4000K/6500K or 3000K/4000K/6500K Switchable CCT
Lighting Method	Backlite
Light Source	SMD2835
SDCM	<3
Beam Angel	90° Micro Prismatic Diffuser; 120° Opalic Diffuser
Service Life	L80B10 (25°C) > 50.000h
IP Rating	IP40
Impact Resistance	IK04
Hot Wire Resistance	650°C
Driver	Flicker Free On/off driver as standard
Dimmable	1-10V, DALI, Push Dim, Bluetooth Optional
Nominal Frequency	50/60Hz
Power Factor	>0.9
Input Voltage	200~240V
Flick Free	Yes
Housing Color	RAL9016 White
Housing Material	Aluminum frame, Steel housing
Lens Material	Acrylic (PMMA)
Diffuser Material	Polystyrene (PS), (Optional PMMA/PC)
Storage Temp.	-40°C~+80°C
Working Temp.	-20°C~+45°C
Mount	Recessed
Package	1pcs per gift box, 4pcs per master box
Warranty	5 years

According to the International Standard of LED luminaire, here Cyanlite formally claims this product is only allowed to be applied to indoor environment. Meanwhile Cyanlite promises full warranty for the products. Any severe environment application including high/low temperature, high humidity, high salinity, high ammonia etc. is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed. All values are typical values measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Rev: 1.0 2026/03/10



Cyanlite™
LED Luminaires
For
Recessed
Surface Mounted
● Suspended
Wall Mounted
Standing & Desktop
Installations

www.cyanlite.com

