



SSHETrP

Dimension

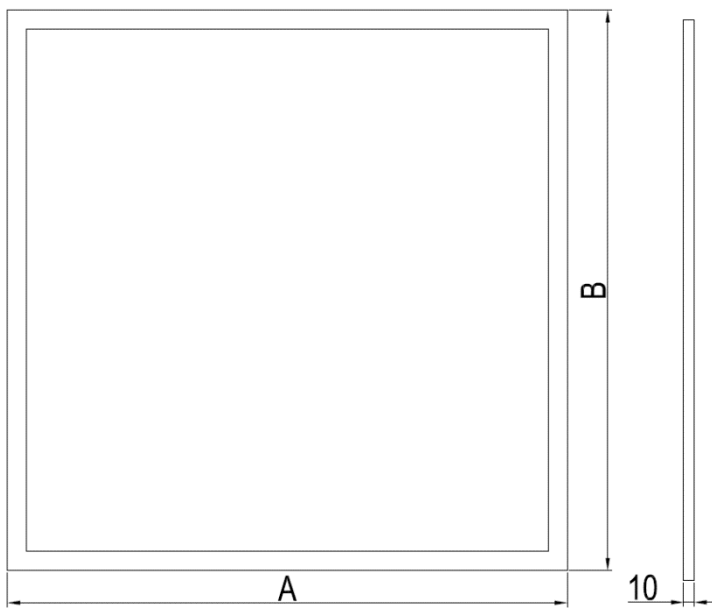

Light Distribution

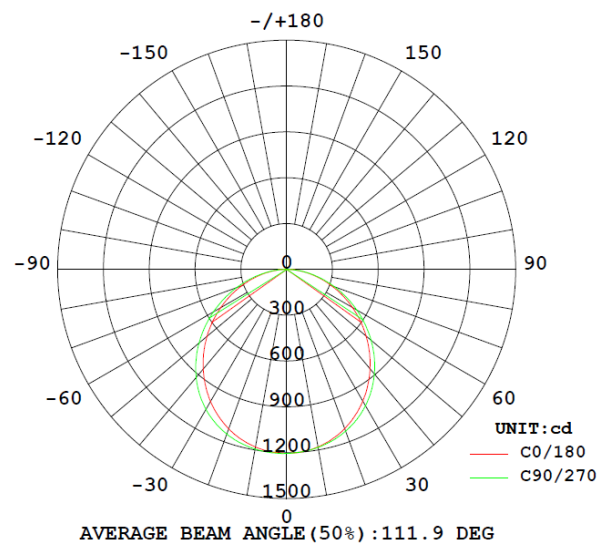

Model	Width (mm)	Length (mm)	Height (mm)
600 x 600 Panel	595	595	□
300 x 1200 Panel	292	1195	□
600 x 1200 Panel	595	1195	□

Technical Data

Model for Grid Type	600 x 600	300 x 1200	600 x 1200
Product Dimension	595 x 595 x 30mm	295 x 1195 x 30mm	595 x 1195 x 30mm
Item No.	PS40W060-940	PS40W312-940	PS60W612-940
Luminous Flux	4000lm	4000lm	6000lm
System Power	40W	40W	60W
Efficacy	100lm/W ≥ 4000K		
CRI	Ra>97, R9>95		
Color Temp.	4000K ± 300K		
Lighting Method	Backlite		
Light Source	SMD2835		
SDCM	<3		
Beam Angel	110°/90°		
Service Life	L80 (25°C) = 50.000h		
IP Rating	IP20		
Impact Resistance	IK04		
Hot Wire Resistance	650°C		
Driver	On/off driver as standard		
Dimmable	1-10V dimming and DALI dimming optional		
Nominal Frequency	50/60Hz		
Power Factor	>0.9		
Input Voltage	200~240V		
Flick Free	Yes		
Housing Color	RAL9016 White		
Housing Material	Aluminum frame, steel backboard		
Lens Material	Acrylic (PMMA)		
Diffuser Material	Polystyrene (PS)		
Storage Temp.	-40°C~+80°C		
Working Temp.	-20°C~+45°C		
Mount	Recessed in ceiling grid, surface mounted and pendant with accessories optional		
Package	1pcs per gift box, 6pcs per master box		
Warranty	5 years		

According to the International Standard of LED luminaire, here Cyanlite formally claims this product is only allowed to be applied to indoor environment. Meanwhile Cyanlite promises full warranty for the products. Any severe environment application including high/low temperature, high humidity, high salinity, high-ammonia etc. is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed. All values are typical values measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Rev: 1.2 2017/09/20