




TRITA - TRACK PANEL

LED LINEAR TRACK LIGHT

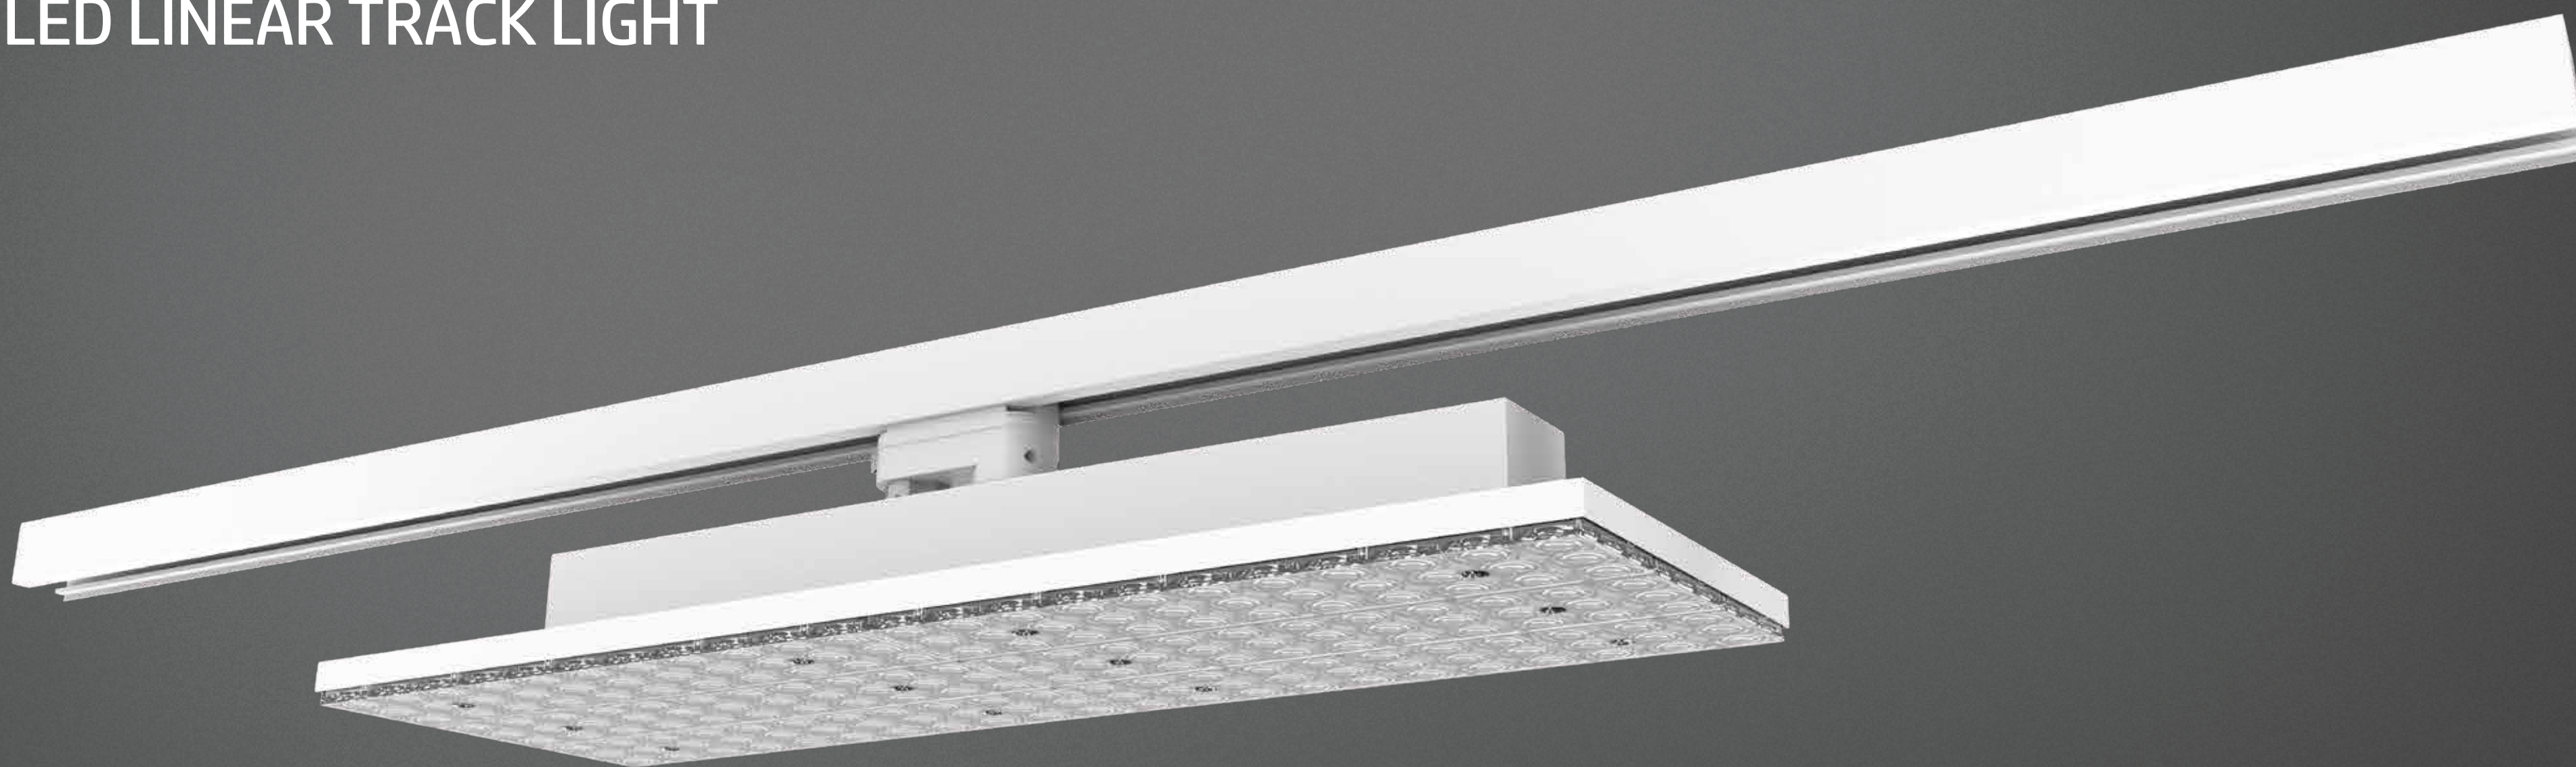

+86 21 3157 9650



WWW.CYANLITE.COM



No.93 Jianhao Road, Pudong
District, Shanghai 201318, China




INFO@CYANLITE.COM

Features


- Universal track adapter
- Power switchable
- Tridonic driver
- Innovative optics
- Up to 160LM/W
- Optional beam angle
- Flicker- free




Universal track adapter, compatible with multiple European 3-circuit tracks.

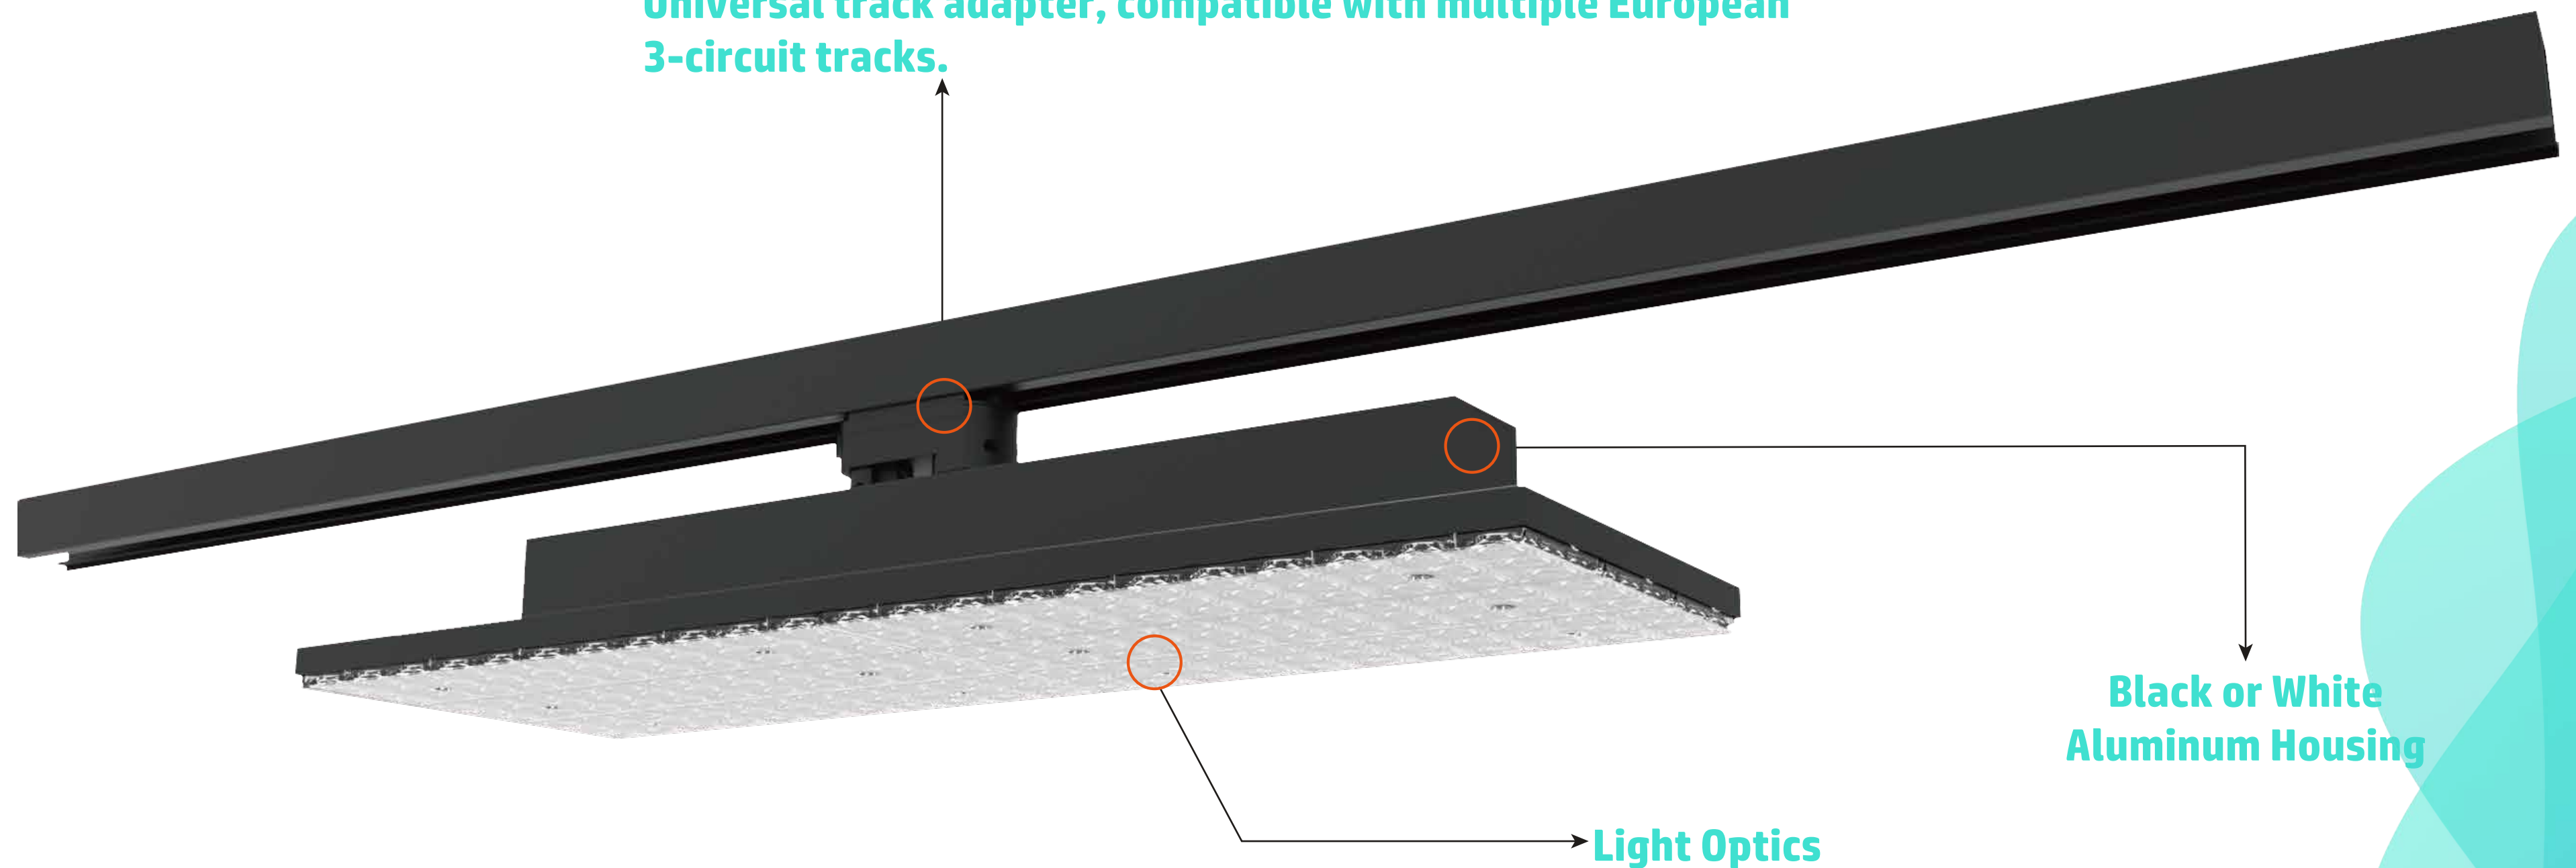

Compatible with all the major track brands, not limited to:




Global




Eutrac




Staff



Ivela





Unipro




Stucchi

Features

350° Flexible
Black and white

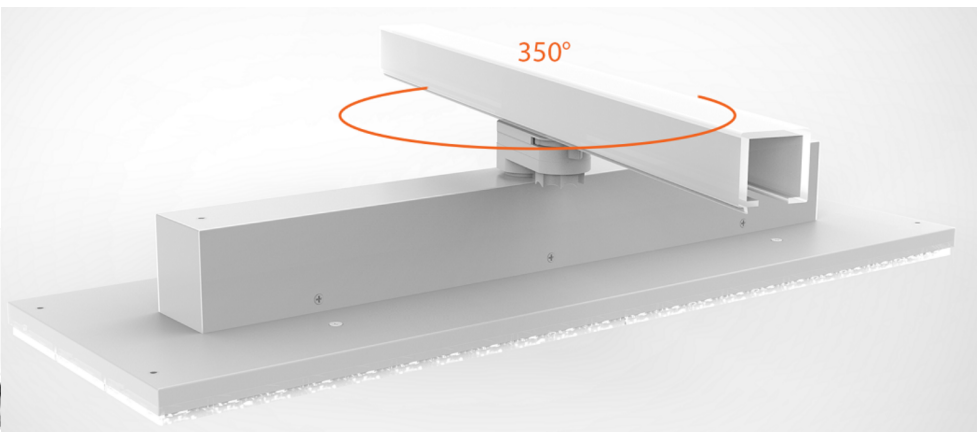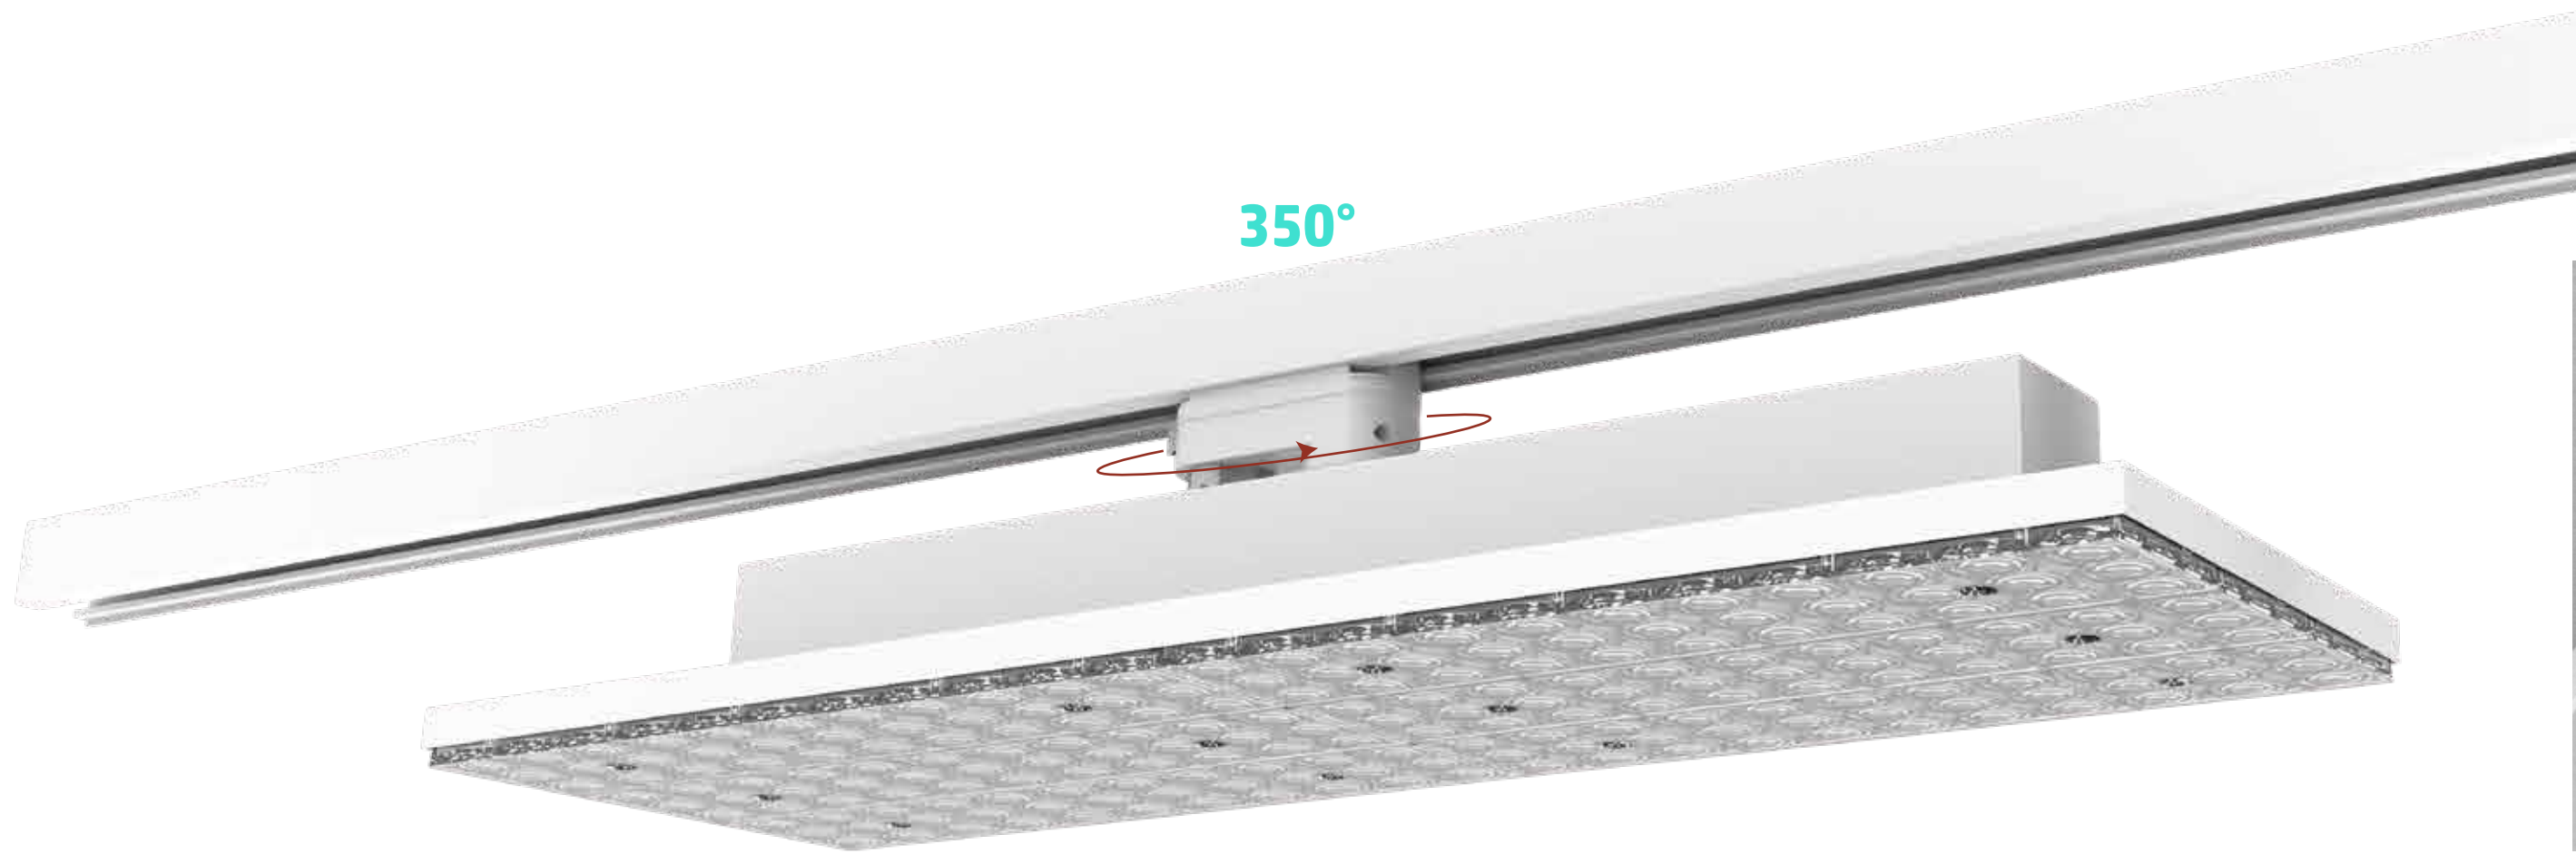

Dimension(mm)

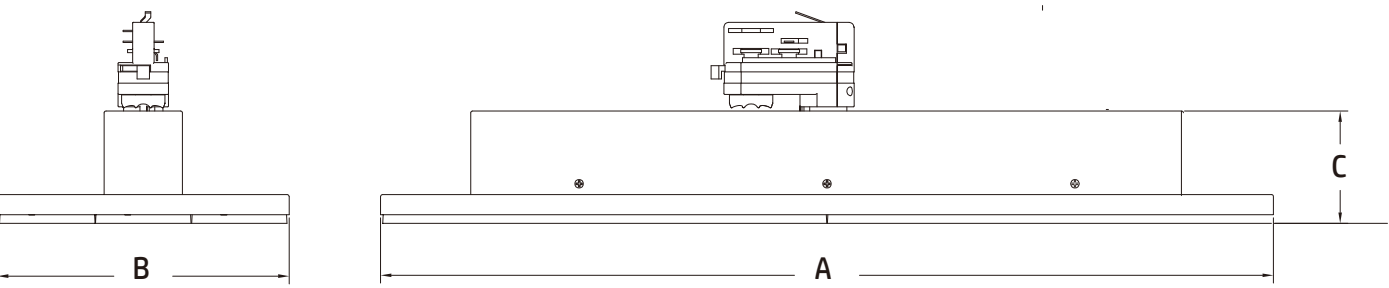


Model NO.	Size A(mm)	Size B(mm)	Size C(mm)
P01 600mm	578mm	189	76

Specification

Voltage	AC220 - 240V, 50/60Hz
Weight	3.2KG
Consistency	< 3 SDCM
CRI (Ra)	> 80 or >90
Operating temperature	-25°C bis +45°C
UGR	< 24
Life time	50.000H [L80B10]
CCT	3000K 4000K 5000K 6000K
Function	Non-Dimming

Track Mounted

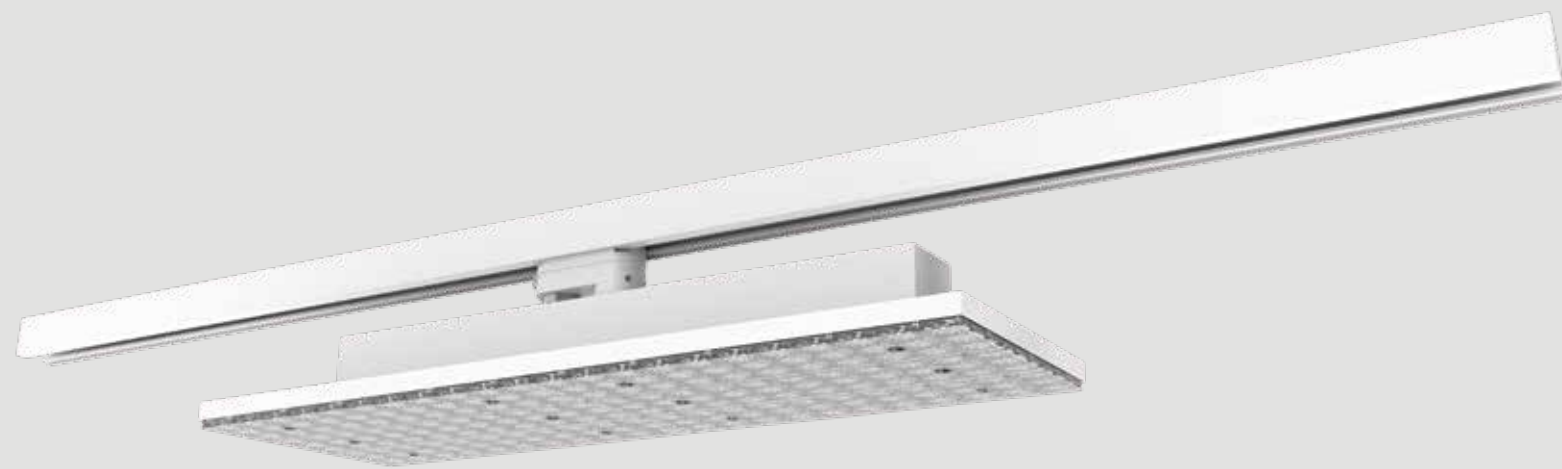




SUSPENSION


Technical/Electrical Characters

Item	Model NO.	Watt		Luminous Efficacy		EEC	L* W* H (mm)
1	P170W060-SP	70W/64W/57W/50W	MAX 11000	150 LM/W	30°	A++	578 x 189 x 76
2	P170W060-NR	70W/64W/57W/50W	MAX 11000	150 LM/W	60°	A++	578 x 189 x 76
3	P170W060-WD	70W/64W/57W/50W	MAX 11000	150 LM/W	90°	A++	578 x 189 x 76
4	P170W060-01	70W/64W/57W/50W	MAX 11000	150 LM/W	DS25° x 60° x 25°	A++	578 x 189 x 76
5	P170W060-03	70W/64W/57W/50W	MAX 11000	150 LM/W	DS25° x 90° x 25°	A++	578 x 189 x 76
6	P170W060-04	70W/64W/57W/50W	MAX 11000	150 LM/W	90° x 60° x 90°	A++	578 x 189 x 76


Installation

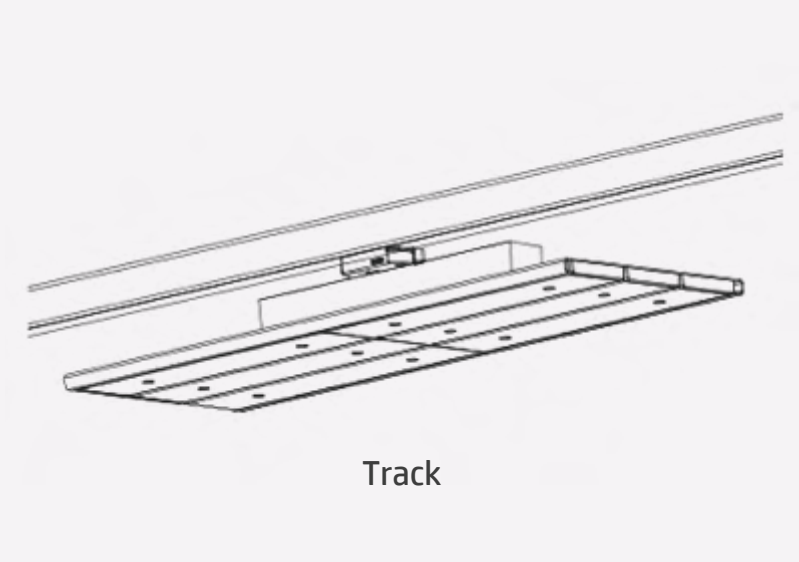

Track

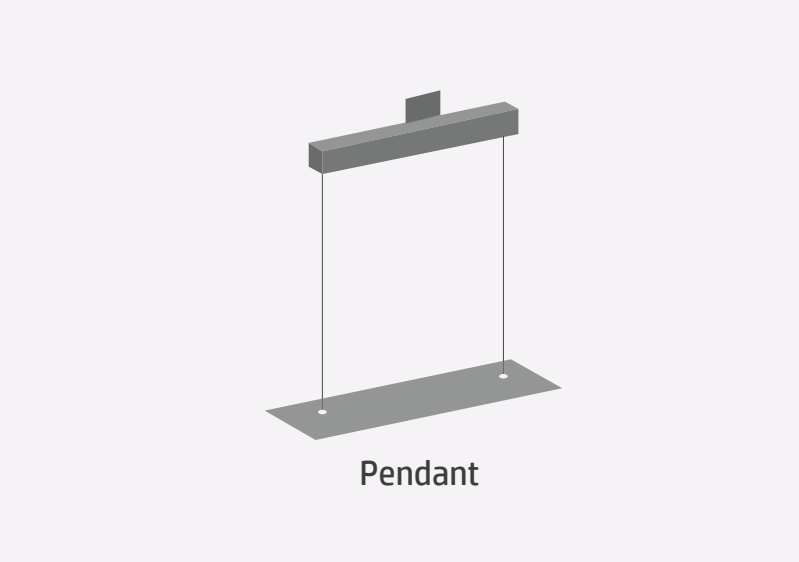


Pendant

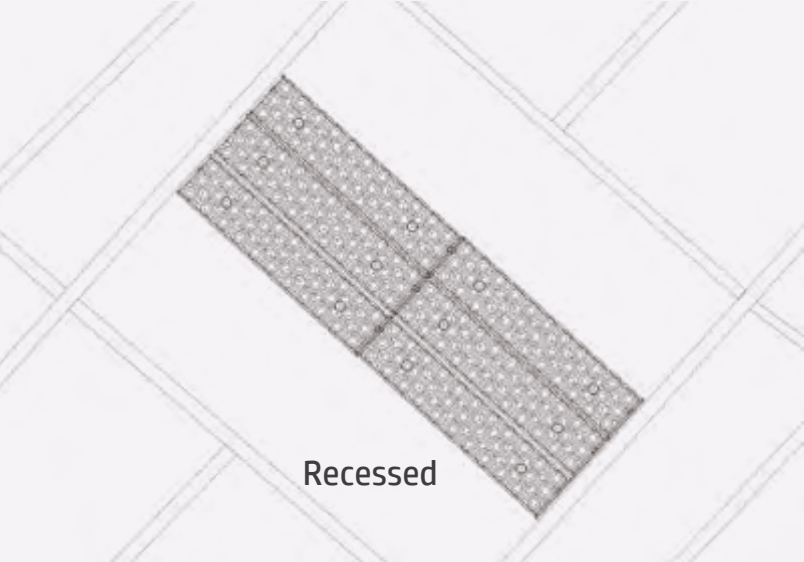


Recessed


Light distribution




60°




90°




DS 25°



DS 25° x 60° x DS 25°




DS 25° x 90° x DS 25°

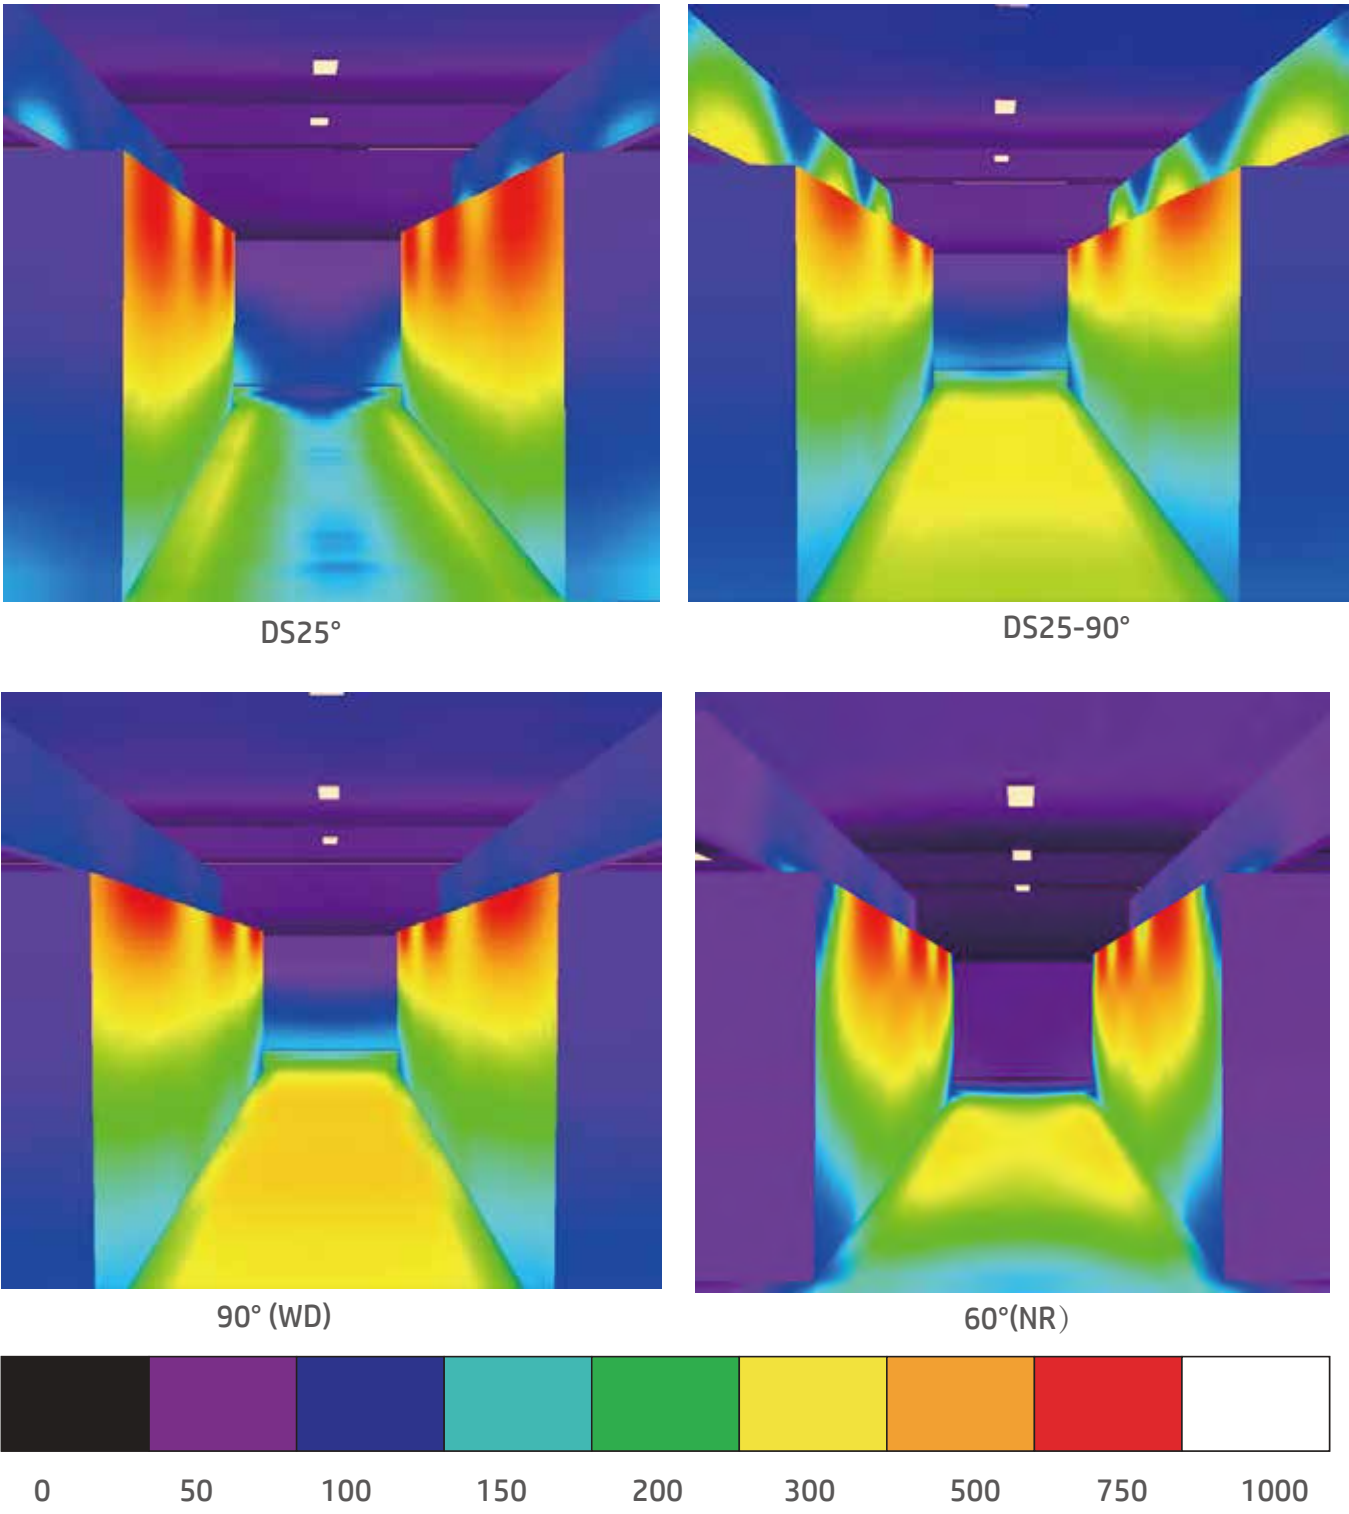

Package

Code	Outer Carton	Qty/Carton	Unit N.W	G.W/Carton
P01	645 x 240 x 200mm	1Pcs	2.9kg	3.2Kg

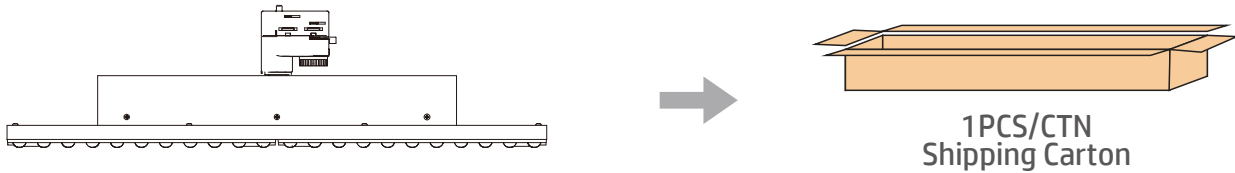

Caution

- ⌘ In case of electric shock, please make sure the power is off before installation.
- ⌘ The lamp should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
- ⌘ Do not use sharp tools near or on the surface of the lamp.
- ⌘ Unpack and examine the product carefully. Report any damage and save all packing materials if any portion of the product was damaged during transportation.