

Cyanlite™

Architectural Lighting
Direct/Indirect Lighting
Office & Administrative Lighting
Metal Ceiling Luminaire
Surface Mounted Luminaire
Free Standing Luminaire

BR021V1.1 2021/4



Shanghai Cyanlite Technology Co., Ltd.


Web: www.cyanlite.com

Tel: +86-21-3157 9655 Fax: +86-21-3157 9655

Email: sales@cyanlite.com

Add: No.93 Jianhao Road, Pudong District, Shanghai 201318, China

Cyanlite LED Panel Lights Selection 2021



Clip-In Metal Ceiling


- Seamlessly integrated with premium Clip-In, also called SAS120/SAS150 or A-BAR metal ceiling systems
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel light for Clip-In Metal Ceiling for SAS120, SAS150, Armstrong S/Q/R Clip-F, DURLUM S1, FURAL KQK1/CLK1, Knauf AMF Clip-in, BURGESS CEP Clip-in/A-Bar, Linder LMD-K420, OWA S22...

The Cyanlite LED panel lights CI150 series has been designed specifically for seamlessly integrated with premium Clip-In, also called SAS120/SAS150 or A-BAR metal ceiling systems. These luminaires fit into the Clip-In ceiling systems perfectly and flush with the ceiling elements with seamless design. Tool-less installation saves huge time for installers and enable them to complete the project easily and quickly.

Scan now
to get
product
details



■ Cyanlite CI150 series LED Panel Light for CLIP-IN Metal Ceilings

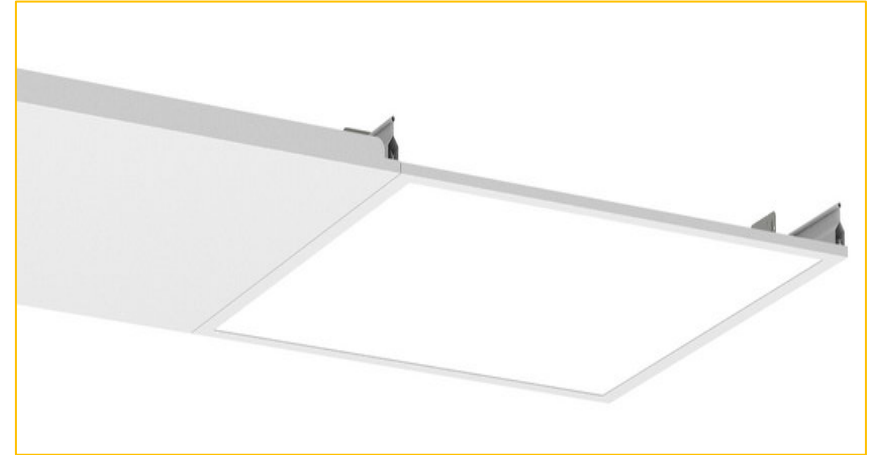

Model	Part Number	Dimension(mm)	Lumen Output	System Power
300x300	PS15W030C	299x299	1500 lm	15 W
300x600	PS20W306C	299x599	2400 lm	20 W
300x900	PS25W309C	299x899	3000 lm	25 W
300x1200	PS30W312C	299x1199	3600 lm	30 W
300x1500	PS35W315C	299x1499	4200 lm	35 W
300x1800	PS45W318C	299x1799	5400 lm	45 W
312.5x625	PS20W307C	311x624	2400 lm	20 W
312.5x1250	PS30W313C	311x1249	3600 lm	30 W
500x500	PS30W050C	499x499	3600 lm	30 W
600x600	PS30W060C	599x599	3600 lm	30 W
600x1200	PS50W612C	599x1199	6000 lm	50 W
625x625	PS30W062C	624x624	3600 lm	30 W
625x1250	PS50W613C	624x1249	6000 lm	50 W
750x750	PS50W075C	749x749	6000 lm	50 W



Hook-Over Metal Ceiling


- Specifically designed for Hook-Over, also called SAS330 ceiling systems.
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel light for Hook-Over Metal Ceiling for SAS330, Armstrong B-H300, DURLUM S5, FURAL KLB5.2, Knauf AMF C-Bandraster, BURGESS CEP Beam, Linder LMD-B100, OWA S48...

The Cyanlite™ LED panel lights HO330 series has been designed specifically for seamlessly integrated with premium Hook-Over, also called SAS330 or C-Channel/C-Profile/C-Bandraster/Post-Cap metal ceiling systems. These luminaires fit into the Hook-Over ceiling systems perfectly and no need any additional accessories, saving huge time for installers and enable them to complete the project easily and quickly.

Scan now to get product details




■ Cyanlite HO330 series LED Panel Light for HOOK-OVER Metal Ceilings

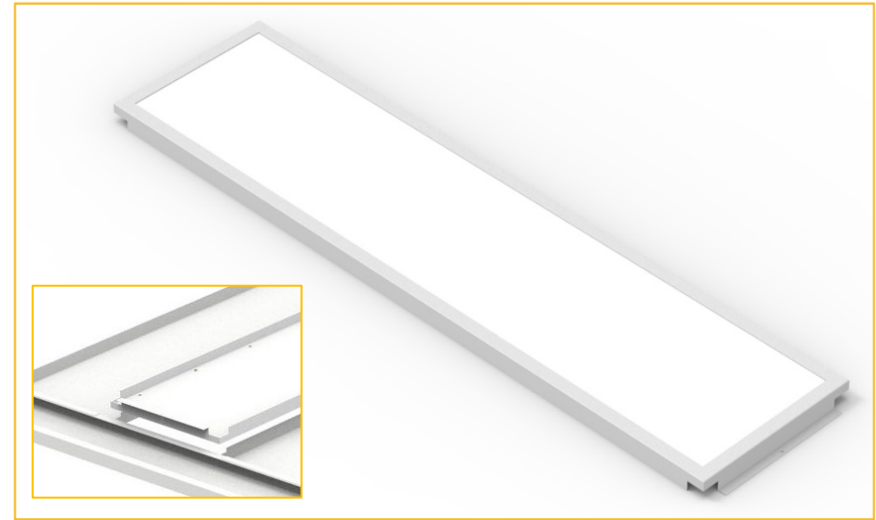

Model	Product No.	Dimension (mm)	Luminous Flux	System Power
300x1200	PS30W312H	299x1199x30	3600lm	30W
300x1350	PS35W313H	299x1349x30	4200lm	35W
300x1400	PS35W314H	299x1399x30	4200lm	35W
312.5x1250	PS30W313H	311x1249x30	3600lm	30W
400x1800	PS45W418H	399x1799x30	5400lm	45W
450x1350	PS35W414H	449x1349x30	4200lm	35W
600x1200	PS50W612H	599x1199x30	6000lm	50W





Hook-On Metal Ceiling


- Specifically designed for Hook-On, also called SAS200 ceiling systems.
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel light for Hook-On Metal Ceiling for SAS200, Armstrong Linear Plank, DURLUM S4, FURAL KQH2/KLH2/KLG2, Knauf AMF Mondena Hook-On, Linder LMD-E200, OWA S39...

The Cyanlite™ LED panel lights HO200 series has been designed specifically for seamlessly integrated with premium Hook-On, also called SAS200 or Hang-In metal ceiling systems. These luminaires fit into the Hook-On ceiling systems perfectly and flush with the ceiling elements with seamless design. Tool-less installation saves huge time for installers and enable them to complete the project easily and quickly..

Scan now
to get
product
details




■ Cyanlite HO200 series LED Panel for HOOK-ON Metal Ceilings

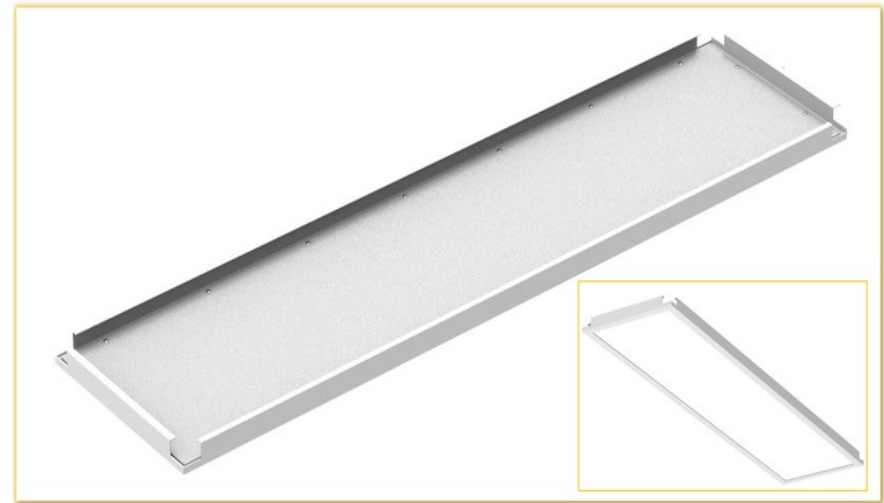

Model	Part Number	Dimension (mm)	Lumen Output	System Power
300x1200	PS30W312O	299x1199	3600 lm	30 W
312.5x1250	PS30W313O	311x1249	3600 lm	30 W
600x600	PS30W060O	599x599	3600 lm	30 W
600x1200	PS50W612O	599x1199	6000 lm	50 W
600x1800	PS65W618O	599x1799	7800 lm	65 W
625x625	PS30W062O	624x624	3600 lm	30 W
625x1250	PS50W613O	624x1249	6000 lm	50 W
625x1875	PS65W619O	624x1874	7800 lm	65 W





Lay-In Ceiling


- Specifically designed for Lay-In, also called SAS130 ceilings.
- EN 12464-1 & LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel light for Lay-In ceilings for SAS130, Armstrong Tegular, Rockfon Lay-In, FURAL KQV3, Knauf AMF System C/VT, Linder LMD-K400, OWA S3a/S15a/S6b/S15b, Gradhermetic Semivista..

The Cyanlite™ LED panel lights LI130 series has been designed specifically for seamlessly integrated with premium Lay-In, also called SAS130 or Tegular/Alugrid/Drop ceiling systems. These luminaires fit into the Lay-In ceiling systems perfectly and flush with the other ceiling tiles, making the whole ceiling system uniform and elegant. Moreover, besides the normal width frame, Cyanlite also has the options for Narrow Frame (4mm width) and Frameless designs for customers' different preferences.



Scan now
to get
product
details



■ Cyanlite LI130 LED Panel Light for T15/T24 LAY-IN Ceilings

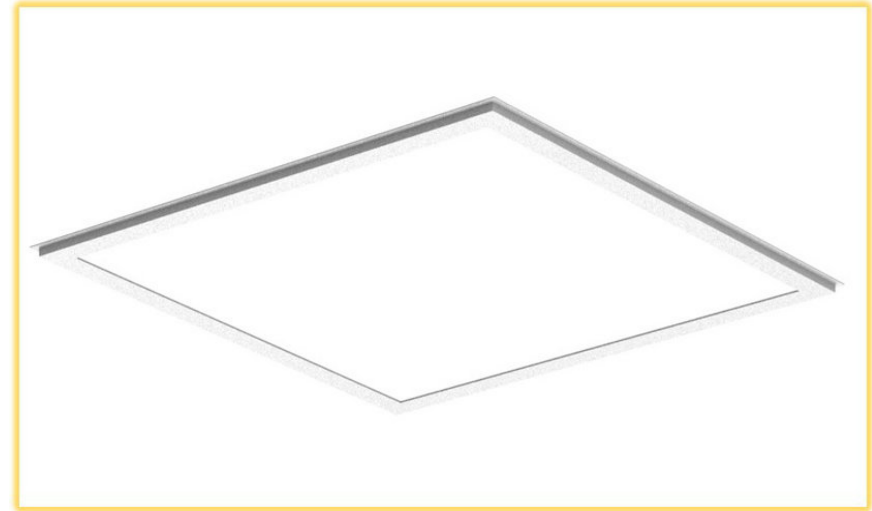

T bar Width	Model	Part No.	Power	Luminous Flux	Dimension (mm)
T15	500x500	PS30W050L-T15	30 W	3600 lm	484x484
	600x600	PS30W060L-T15	30 W	3600 lm	584x584
	625x625	PS30W062L-T15	30 W	3600 lm	609x609
	750x750	PS50W075L-T15	50 W	6000 lm	734x734
T24	500x500	PS30W050L-T24	30 W	3600 lm	474x474
	600x600	PS30W060L-T24	30 W	3600 lm	574x574
	625x625	PS30W062L-T24	30 W	3600 lm	599x599
	750x750	PS50W075L-T24	50 W	6000 lm	724x724

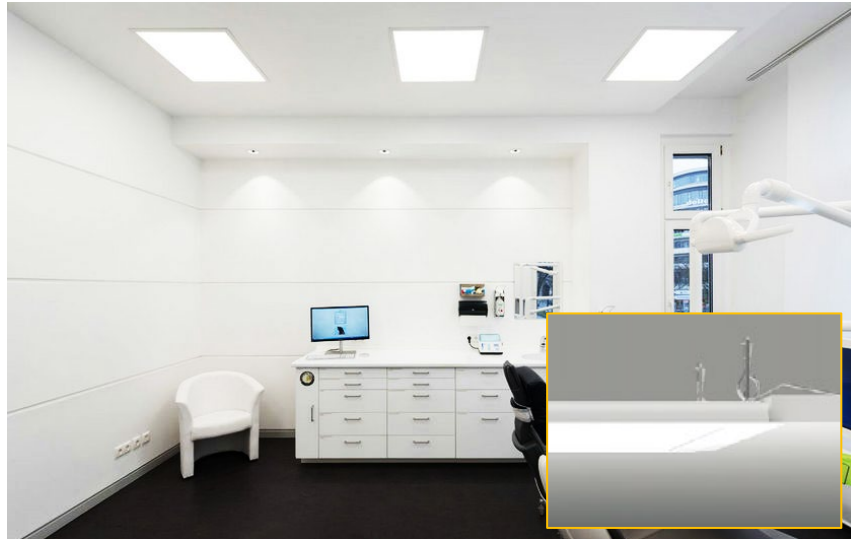

Gypsum Board Ceiling

- Recessed frame design for plasterboard recessed installation
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The Cyanlite™ LED panel lights Recessed Frame series has been designed for the gypsum board/plasterboard/Cut-Out/prepared aperture ceilings.



Scan now
to get
product
details



■ Cyanlite RF Recessed Frame LED Panel for GYPSUM Board Ceilings





Part No.	Power	Luminous Flux	Dimension (mm)	Cut-Out size (mm)	Efficiency
PS30W111R	30W	3600lm	150x1150x10	135x1135	120lm/W
PS30W112R	30W	3600lm	184x1231x10	169x1216	120lm/W
PS30W212R	30W	3600lm	185x1245x10	170x1230	120lm/W
PS30W213R	30W	3600lm	185x1295x10	170x1280	120lm/W
PS35W215R	35W	4200lm	185x1495x10	170x1480	120lm/W
PS30W312R	30W	3600lm	295x1195x10	280x1180	120lm/W
PS30W313R	30W	3600lm	308x1245x10	293x1230	120lm/W
PS35W316R	35W	4200lm	310x1547x10	295x1532	120lm/W
PS30W050R	30W	3600lm	495x495x10	480x480	120lm/W
PS30W060R	30W	3600lm	595x595x10	580x580	120lm/W
PS30W062R	30W	3600lm	620x620x10	605x605	120lm/W



Aircon Slot


- With Air Slots/ Air Vents for air handing/return
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel light with Aircon Slot/ Air slots/ Air Vents series is a product that combines premium LED panel light and air slots. Aesthetic simple design with double function.

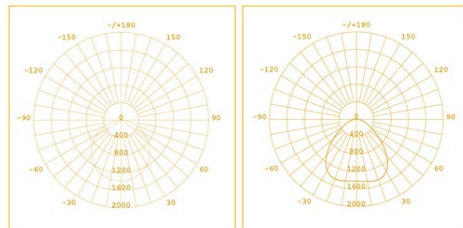

Scan now
to get
product
details



■ Cyanlite LED Panel Light with Air Vents

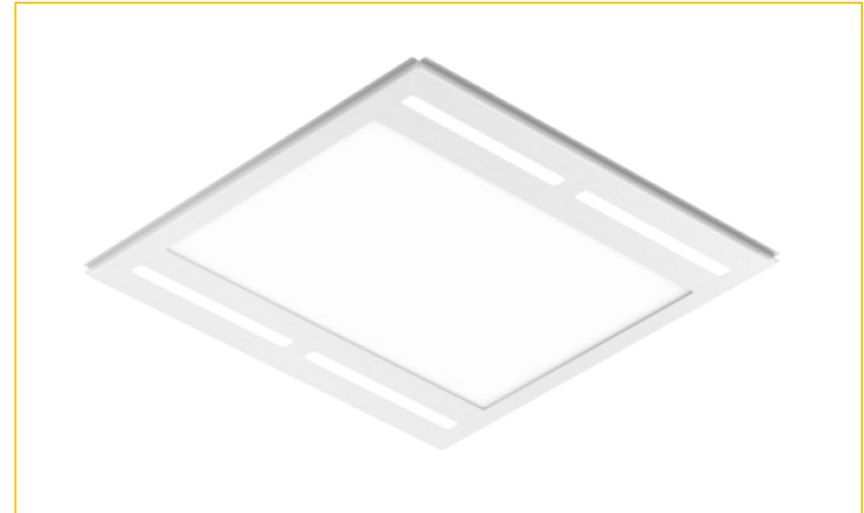


Model	Part Number	Dimension (mm)	Lumen Output	System Power
600x600	PB40W060-AS	595x595	4000 lm	40 W
300x1200	PB40W312-AS	295x1195	4000 lm	40 W
600x1200	PB60W612-AS	595x1195	6000 lm	60 W





Backlite LED Panel with Built-In Sensor


- For T15/T24 Lay-On ceiling/Plasterboard Ceiling
- LED backlight technology, EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite Backlite LED panel with Built-In Sensor, compatible with DALI/Bluetooth/WIFI protocol, system with Philips Wiz/Xitanium SR/Casambi etc.,

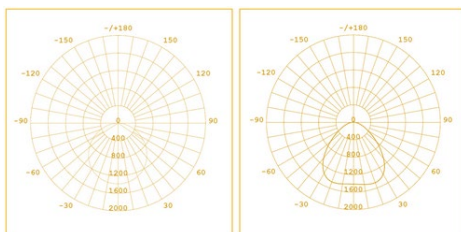

Scan now
to get
product
details



■ Cyanlite BACKLITE LED Panel Light with Built-In sensor

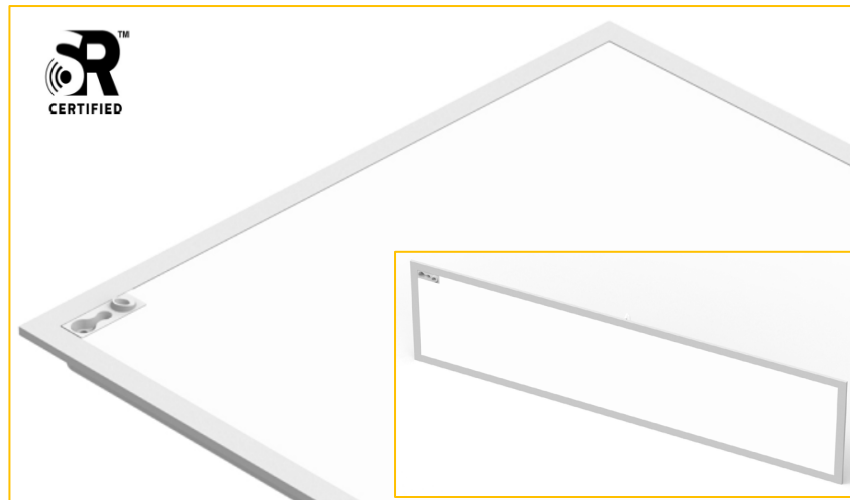


Model	Dimension	Product No.	Power	Luminous Flux	Efficiency @ 4000K
600 x 600	595 x 595 x 30mm	PB30W060P	30W	3750lm	125lm/W
		PB35W060P	35W	4375lm	125lm/W
		PB40W060E	40W	4000lm	100lm/W
625 x 625	620 x 620 x 30mm	PB30W062P	30W	3750lm	125lm/W
		PB35W062P	35W	4375lm	125lm/W
		PB40W062E	40W	4000lm	100lm/W
300 x 1200	295 x 1195 x 30mm	PB30W312P	30W	3750lm	125lm/W
		PB35W312P	35W	4375lm	125lm/W
		PB40W312E	40W	4000lm	100lm/W
600 x 1200	595 x 1195 x 30mm	PB45W612P	45W	5625lm	125lm/W
		PB60W612E	60W	6000lm	100lm/W



Waterproof IP65 LED Panel Light



- IP65 waterproof design
- Rain proof anti-fogging, dust proof, damp proof, insects-proof. Blocking Cooking Fume
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The Cyanlite IP65 waterproof panel lights are perfect solution for dusty and wet places where it requires higher IP protection of wet air, steaming, splashing, raining, etc. Perfect for anti-fogging,

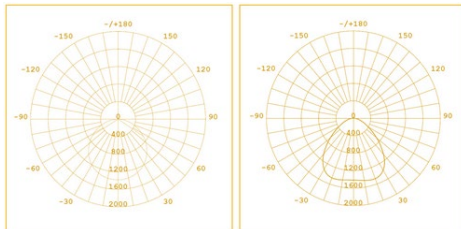

Scan now
to get
product
details



Cyanlite IP65 Waterproof LED Panel Light





Model	Part Number	Dimension (mm)	Lumen Output	System Power
300x600	PB25W306-IP	295x595	2500 lm	25 W
600x600	PB40W060-IP	595x595	4000 lm	40 W
300x1200	PB40W312-IP	295x1195	4000 lm	40 W
600x1200	PB60W612-IP	595x1195	6000 lm	60 W





Backlite LED Panel Light for Lay-On ceiling

- For T15/T24 Lay-On ceiling
- LED backlight technology, EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite Backlite LED panel for Lay-On ceiling, non-yellowing lens & FF driver. COI<3.3 compliant, daylight and motion sensor by smart control, tunable white and RGBW optional.

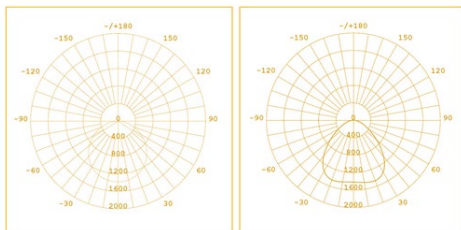

Scan now to get product details



■ Cyanlite BACKLITE LED Panel Light for T15/T24 LAY-ON Ceilings



- Step frame design with spring clip and trim to cover the cut-out hole for recessed installation





Model	Dimension	Product No.	Power	Luminous Flux	Efficiency @ 4000K
600 x 600	595 x 595 x 30mm	PB30W060P	30W	3750lm	125lm/W
		PB35W060P	35W	4375lm	125lm/W
625 x 625	620 x 620 x 30mm	PB30W062P	30W	3750lm	125lm/W
		PB35W062P	35W	4375lm	125lm/W
300 x 1200	295 x 1195 x 30mm	PB30W312P	30W	3750lm	125lm/W
		PB35W312P	35W	4375lm	125lm/W
600 x 1200	595 x 1195 x 30mm	PB45W612P	45W	5625lm	125lm/W



Sidelite for Lay-On ceiling


- For T15/T24 Lay-On ceiling
- EN 12464-1 & LG7 Compliant, UGR<19
- Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite Sidelite LED panel for Lay-On ceiling, with PMMA LGP & FF driver, 5 years warranty and a wide range with more than 20 standard sizes, customized oriented.

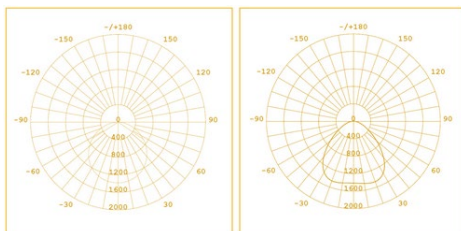

Scan now
to get
product
details



■ Cyanlite SIDELITE LED Panel Light for T15/T24 LAY-ON Ceilings

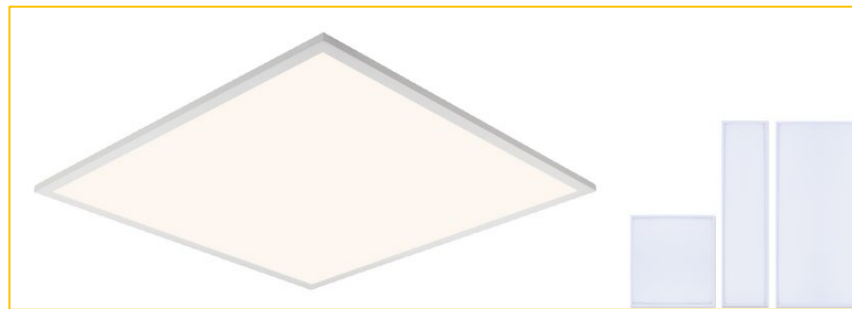

Model	Part No.	Power	Luminous Flux	Dimension (mm)
184x1231	PS22W213	22 W	2500 lm	184x1231x10
190x1250	PS30W212	30 W	3600 lm	185x1245x10
190x1300	PS30W213	30 W	3600 lm	185x1295x10
190x1500	PS35W215	35 W	4200 lm	185x1495x10
300x300	PS15W030	15 W	1800 lm	295x295x10
300x600	PS20W306	20 W	2400 lm	295x595x10
300x1200	PS30W312	30 W	3600 lm	295x1195x10
300x1500	PS35W315	35 W	4200 lm	295x1495x10
300x1800	PS45W318	45 W	5400 lm	295x1795x10
310x1547	PS40W316	40 W	5000lm	310x1547x10
312.5x1250	PS30W313G	30W	3600 lm	308x1245x10
312.5x1500	PS35W315G	35 W	4200 lm	308x1495x10
312.5x1800	PS45W318G	45 W	5400 lm	308x1795x10
400x1200	PS30W412	30W	3600 lm	395x1195x10
400x1250	PS30W413	30W	3600 lm	395x1245x10
400x1500	PS35W415	35 W	4200 lm	395x1495x10
400x1800	PS45W418	45 W	5400 lm	395x1795x10
500x500	PS30W050	30 W	3600 lm	495x495x10
600x600	PS30W060	30 W	3600 lm	595x595x10
600x1200	PS50W612	50 W	6000 lm	595x1195x10
625x625	PS30W062	30 W	3600 lm	620x620x10
625x1250	PS50W613	50W	6000 lm	620x1245x10
750x750	PS50W075	50 W	6000 lm	745x745x10



Libra

- Super easy surface mounted installation
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The Cyanlite™ LED panel lights LIBRA series has been designed specifically for Surface Mounted installation on Plasterboard and Concrete ceilings.


With Cyanlite patented mounting fixture, the installer no need to make the positioning when install, so the installation is simple and easy, also no need to dismantle and reassemble as traditional surface mounted luminaires, saving huge time for installers and enabling them to complete the project easily and quickly.




Scan now
to get
product
details



LIBRA LED Surface Mounted Luminaire – Down version

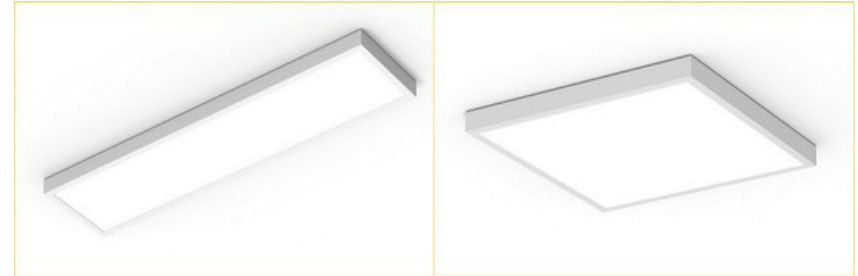

• Direct light version



Model	Part No.	Power	Luminous Flux	Dimension (mm)
450x450	SM25W045	25W	3000 lm	450x450x45
600x600	SM30W060	30W	3600 lm	600x600x45
625x625	SM30W062	30W	3600 lm	620x620x45
300x1200	SM34W312	34W	4000 lm	300x1200x45
300x1500	SM42W315	42W	5000 lm	300x1500x45
184x1231	SM22W112	22W	2500 lm	184x1231x45
184x1531	SM42W115	42W	5000 lm	184x1531x45
284x1231	SM34W212	34W	4000 lm	284x1231x45
284x1531	SM42W215	42W	5000 lm	284x1531x45
310x1247	SM34W313	34W	4000 lm	310x1247x45
310x1547	SM42W316	42W	5000 lm	310x1547x45



Libra UD

- Super easy surface mounted installation, Up and Down light
- EN 12464-1& LG7 Compliant, UGR<19 Optional
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: The Cyanlite™ LED panel lights LIBRA series has been designed specifically for Surface Mounted installation on Plasterboard and Concrete ceilings. LIBRA UD is the up and down light version of LIBRA.

With Cyanlite patented mounting fixture, the installer no need to make the positioning when install, so the installation is simple and easy, also no need to dismantle and reassemble as traditional surface mounted luminaires, saving huge time for installers and enabling them to complete the project easily and quickly.


Scan now
to get
product
details




LIBRA UD LED Surface Mounted Luminaire – Up/Down version



• Direct/indirect light version



Model	Part No.	Power	Luminous Flux	Dimension (mm)
450x450	SM25W045-UD	25W	300 lm↑2700 lm↓	450x450x70
600x600	SM30W060-UD	30W	360 lm↑3240 lm↓	600x600x70
625x625	SM30W062-UD	30W	360 lm↑3240 lm↓	620x620x70
300x1200	SM34W312-UD	34W	400 lm↑3600 lm↓	300x1200x70
300x1500	SM42W315-UD	42W	500 lm↑4500 lm↓	300x1500x70
184x1231	SM22W112-UD	22W	250 lm↑2250 lm↓	184x1231x70
184x1531	SM42W115-UD	42W	500 lm↑4500 lm↓	184x1531x70
284x1231	SM34W212-UD	34W	400 lm↑3600 lm↓	284x1231x70
284x1531	SM42W215-UD	42W	500 lm↑4500 lm↓	284x1531x70
310x1247	SM34W313-UD	34W	400 lm↑3600 lm↓	310x1247x70
310x1547	SM42W316-UD	42W	500 lm↑4500 lm↓	310x1547x70



Architectural Panel Light NOVA for Lay-On ceiling

- For T15/T24 Lay-On ceiling
- 5 Years Warranty
- Certification: CE, RoHS
- Easy Installation
- Product description: NOVA - Cyanlite architectural lighting LED panel light NOVA series model, something different on your ceilings.




Scan now to get product details



NOVA – LED Architectural Panel Light




Model	Part No.	Power	Luminous Flux	Dimension (mm)
600x600	PB40W060E-N1	40 W	3200 lm	595x595x30
625x625	PB40W062E-N1	40 W	3200 lm	620x620x30
600x600	PB40W060E-N2	40 W	3000 lm	595x595x30
625x625	PB40W062E-N2	40 W	3000 lm	620x620x30
600x600	PB40W060E-N3	40 W	3200 lm	595x595x30
625x625	PB40W062E-N3	40 W	3200 lm	620x620x30
600x600	PB40W060E-N4	40 W	3200 lm	595x595x30
625x625	PB40W062E-N4	40 W	3200 lm	620x620x30



Architectural Troffer TROFA

- For T15/T24 Lay-On ceiling
- Double Prismatic Diffuser UGR<19
- Certification: CE, RoHS
- 5 Years Warranty
- Product description: TROFA - LED architectural troffer light delivering soft, high-quality light with excellent glare control UGR<19.



Double MP and UGR<19



Scan now
to get
product
details




TROFA – LED Architectural Troffer Light




Cyanlite™ TROFA LED Troffer Panel Light

- Low Glare, UGR<19
- Elegant Design
- 5 Years Warranty

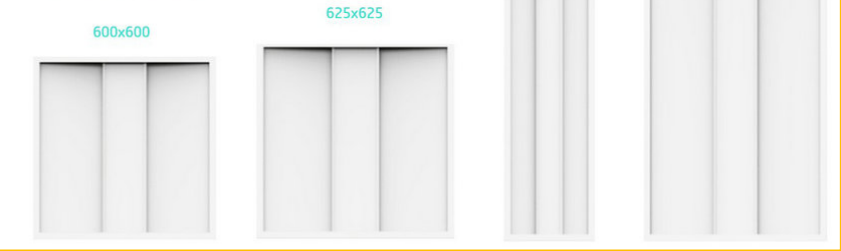


Model	Part No.	Power	Luminous Flux	Dimension (mm)
600x600	PB40W060-T1	40W	4000 lm	595x595x43
625x625	PB40W062-T1	40W	4000 lm	620x620x43
300x1200	PB40W312-T1	40W	4000 lm	295x1195x43
600x1200	PB60W612-T1	60W	6000 lm	595x1195x43






Vibes

- Direct and indirect light with Opalic diffuser or Transparent diffuser, non-yellowing PMMA light guide
- 130lm/W, available light panel length 1.2m, 1.5m, and 1.8m
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED panel Vibes UD family for direct and indirect light by suspended installation, 130lm/W, available length 1.2m, 1.5m and 1.8m, non-yellowing PMMA LGP.



UD



TP


Up/Down Suspended Transparent Suspended



Scan now to get product details



VIBES Linear LED Panel Light – Up/Down |Transparent

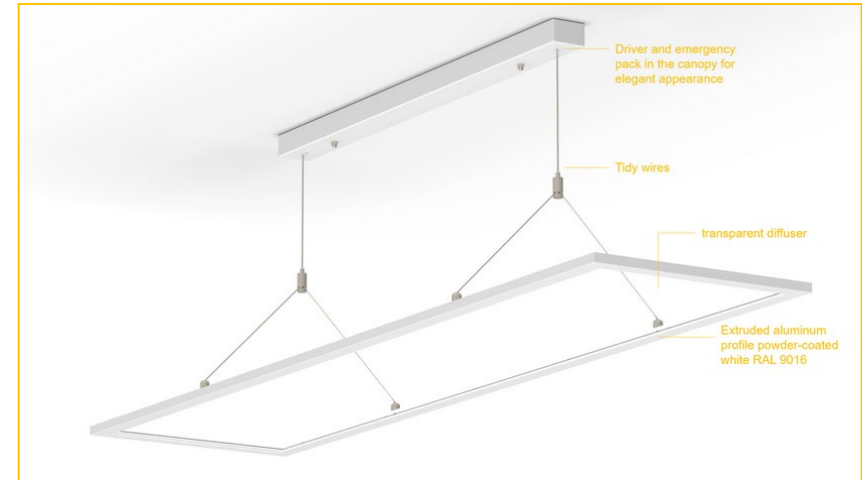


Model	Part No.	Power	Luminous Flux	Dimension
300x1200	PS30W312P-UD	30W	1170lm↑2730lm↓	295x1195x15 mm
250x1200	PS30W212P-UD	30W	1170lm↑2730lm↓	245x1195x15 mm
250x1500	PS40W215P-UD	40W	1560lm↑3640lm↓	245x1495x15 mm
250x1800	PS45W218P-UD	45W	1755lm↑4095lm↓	245x1795x15 mm
300x1200	PS30W312P-TP	30W	1950lm↑1950lm↓	295x1195x15 mm
250x1200	PS30W212P-TP	30W	1950lm↑1950lm↓	245x1195x15 mm
250x1500	PS40W215P-TP	40W	2600lm↑2600lm↓	245x1495x15 mm
250x1800	PS45W218P-TP	45W	2925lm↑2925lm↓	245x1795x15 mm





Cynthia

- One family with uniform aluminum profile and diameter from 40cm to 120cm
- Same panel by suspended, stem mounted, surface mounted, and recessed just with different accessories
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED round panel light family in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm; suspended, stem mounted, surface mounted, and recessed achievable. Ra>97 optional for medical lighting.



preassembled wires for tidy and quick suspending



durable stem mounting



recess with strong clips



one surface mounted disc for more panel sizes


1 panel, 4 mounting ways.

Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	ø400*20mm	PR28WD40	2940lm	28W	105lm/W
D50	ø500*20mm	PR32WD50	3360lm	32W	105lm/W
D60	ø600*20mm	PR40WD60	4800lm	40W	120lm/W
D80	ø780*20mm	PR55WD80	6600lm	55W	120lm/W
D100	ø1000*20mm	PR75WDH0	9000lm	75W	120lm/W
D120	ø1200*20mm	PR85WDH2	10200lm	85W	120lm/W



Cynthia Surface Mounted


- Easy surface mounted for any ceilings including concrete ceiling
- Down light only or both direct and indirect light, diameter from 40cm to 120cm
- 5 Years Warranty; CE, RoHS2.0, REACH approval
- Product description: Cyanlite LED round panel light family by surface mounted; direct light only or direct and indirect light optional, in diameter of 40cm, 50cm, 60cm, 80cm, 100cm or 120cm.

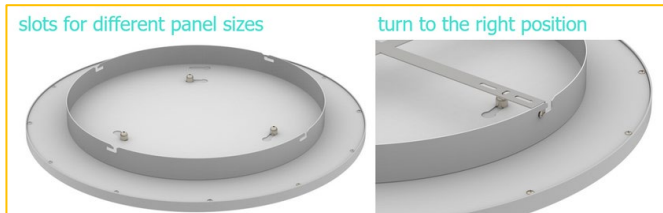

Scan now
to get
product
details



■ CYNTHIA Surface Mounted - Down|Up/Down

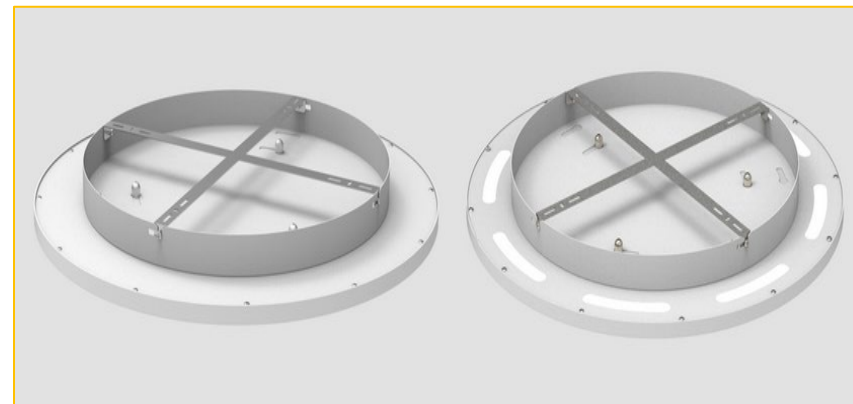

Model	Product Dimension	Item No.	Luminous Flux	System Power	Efficiency @ 4000K
D40	ø400*20mm	PR28WD40 D	2940lm	28W	105lm/W
D50	ø500*20mm	PR32WD50 D	3360lm	32W	105lm/W
D60	ø600*20mm	PR40WD60 D	4800lm	40W	120lm/W
D80	ø780*20mm	PR55WD80 D	6600lm	55W	120lm/W
D100	ø1000*20mm	PR75WDH0 D	9000lm	75W	120lm/W
D120	ø1200*20mm	PR85WDH2 D	10200lm	85W	120lm/W
D40 UD	ø400*20mm	PR28WD40-UD D	2940lm	28W	105lm/W
D50 UD	ø500*20mm	PR32WD50-UD D	3360lm	32W	105lm/W
D60 UD	ø600*20mm	PR40WD60-UD D	4800lm	40W	120lm/W
D80 UD	ø780*20mm	PR55WD80-UD D	6600lm	55W	120lm/W
D100 UD	ø1000*20mm	PR75WDH0-UD D	9000lm	75W	120lm/W
D120 UD	ø1200*20mm	PR85WDH2-UD D	10200lm	85W	120lm/W




Cyanlite™

LED Lighting Products

For

- Lay-On
- Lay-In
- Cut-Out
- Clip-In
- Hook-In
- Hook-Over
- Hook-On
- Double-Hook Ceilings

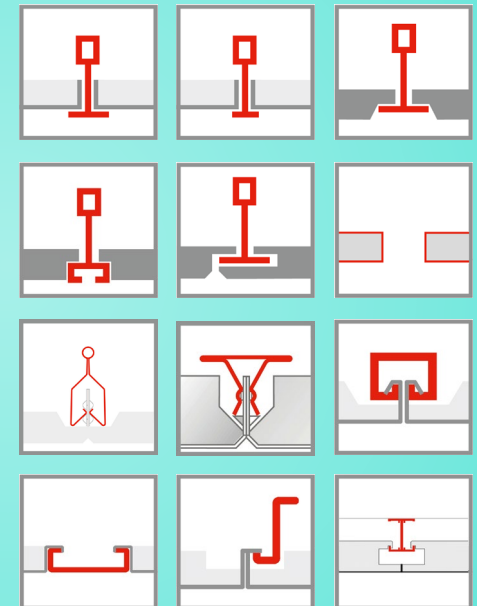

Ceiling Type	Ceiling Diagram	Cyanlite Series	Ceiling Brands and Models examples									
			SAS	Armstrong	DURLUM	FURAL	AMF	BURGESS CEP	unter Dougl	Rockfon	Lindner	Odenwald
Clip-In		CI150	SAS 120					CLIP-IN				
Clip-In		CI150	SAS 150	S-Clip F Q-Clip F R-Clip F	S1	KOK1 KLK1	System A Mondena Clip-in System	CLIP-IN A-BAR	Clip-In	Snap-In	LMD-K 420	S22 S32 S32L
Hook-On		HO200	SAS 200	METALWOR KS™ Linear Plank	S4	KQH2 KLH2 KLK2	System A Mondena Hook-on system	HOOK-ON	Beta-B	Hook-On	LMD-E 200	S39
Hook-Over C-Channel/ C-Profile C-Bandrastrer/ Post-Cap		HO330	SAS 330	B-H 300	S5	KLK5.2	System I C Bandrastrer	MODULAR BEAM LINEAR BEAM	Alpha		LMD-B 100 LMD-B 100 SD LMD-B 110	S48
Hook-In		HI600	SAS 600		S7				Beta-A		LMD-E 213	D39
Double Hook H HANG-IN		DH Double Hook			S10H	KLH-H28			Hook-In		LMD-E 210	
Lay-In Tegular		LI130	SAS130	Tegular		KQV3	System C/ VT	TEGULAR	Lay-in	Lay-in	LMD-K 400	S3a/S15a/S6b

