



Cyanlite Big Round Panel

- One Family, Infinite Options.

- Strength
- Comparison

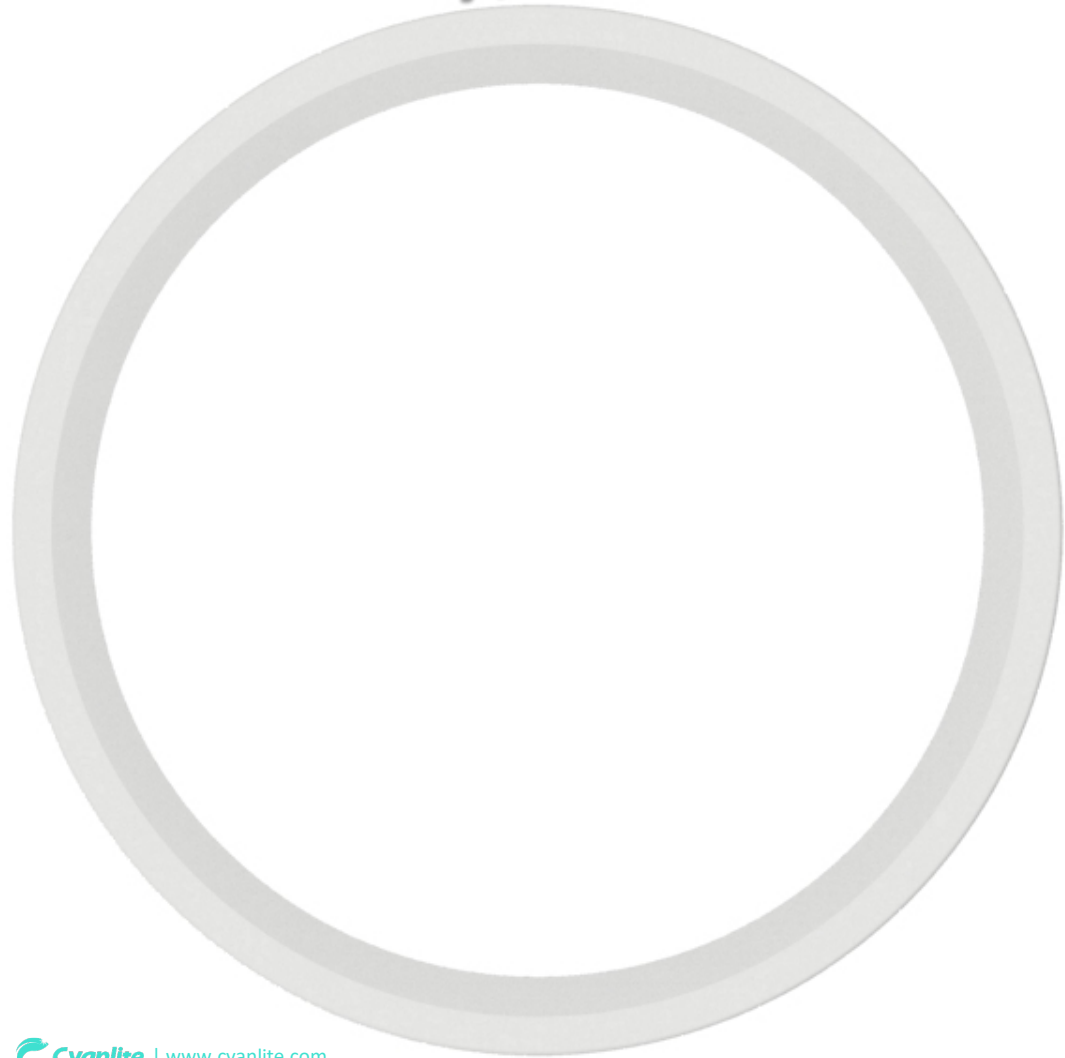

Strength 1: Diameter 40cm ~ 120cm. Make a Design by Combining Different Sizes.

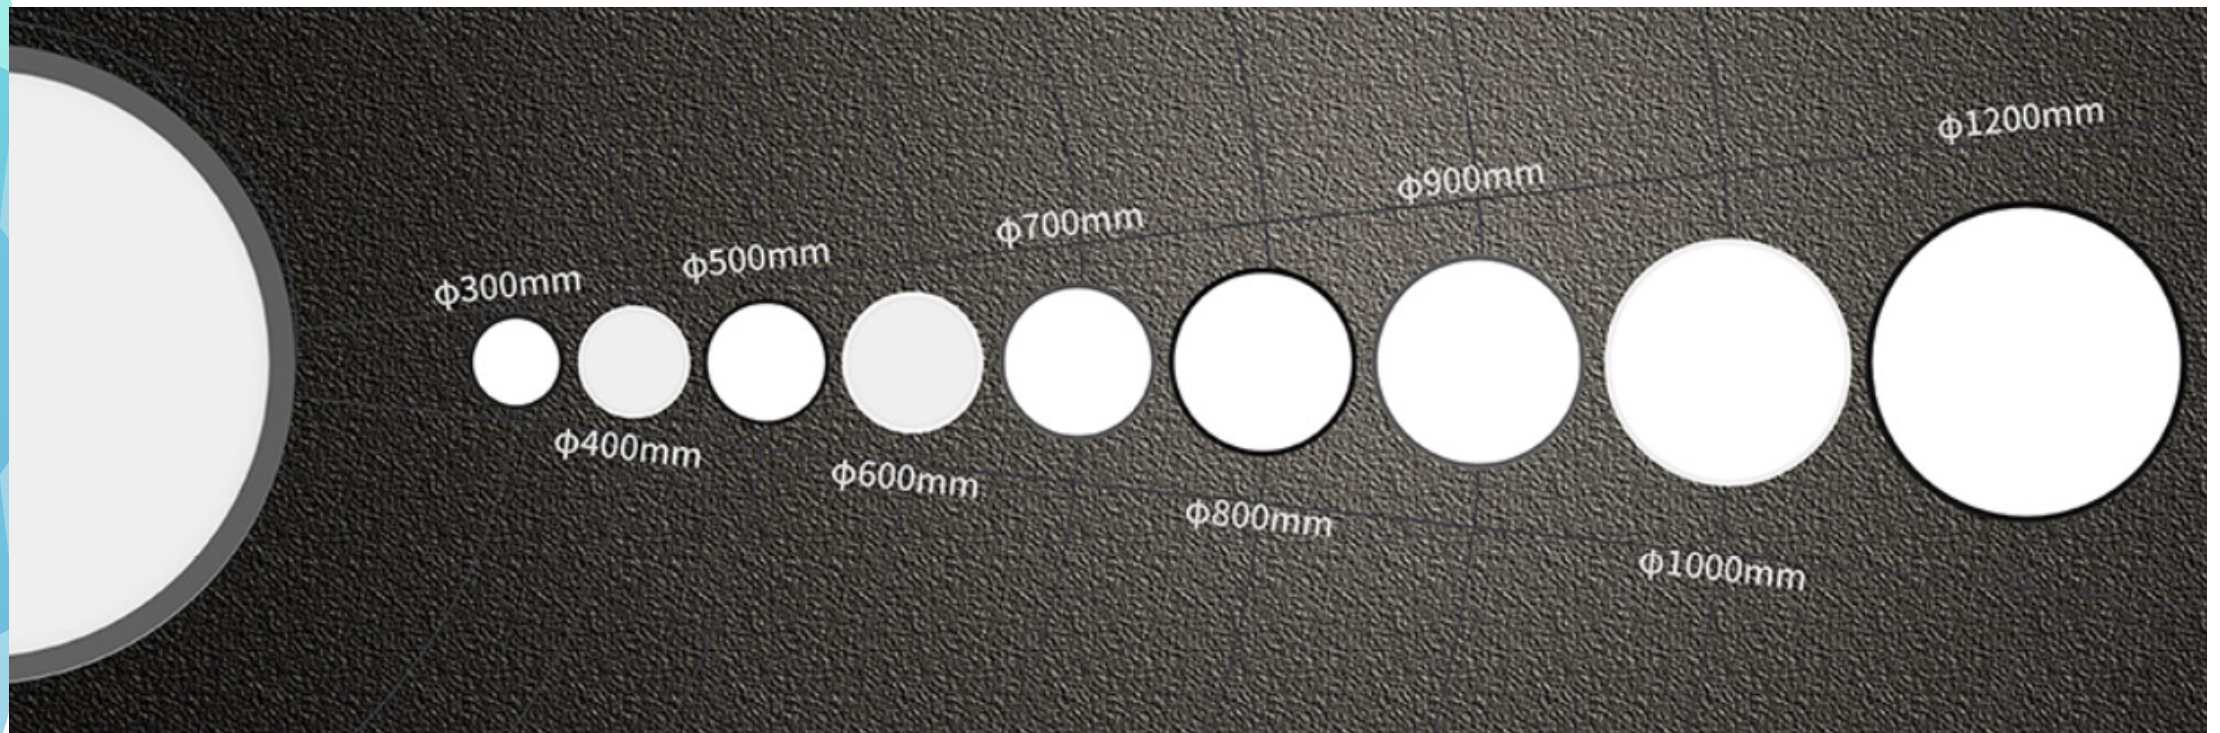

Strength 2: Uniform Profile, One Family.



*Same aluminum profile from diameter 40cm ~ 120cm.
Clean and decent design with consistent look.
Easy for clients styling the space under uniform theme.*




Strength 3: Install without Limits on Ceilings.




Wire Pendant



Stem Pendant

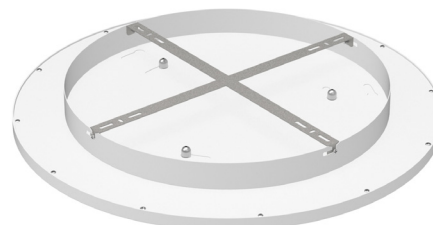


Surface Disc

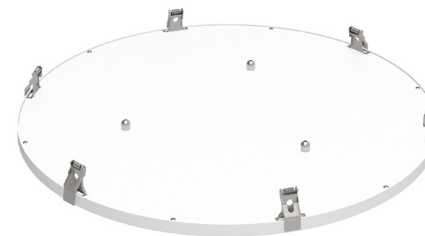

Recess Clips

Same panel, different accessory kits for easy stock control.

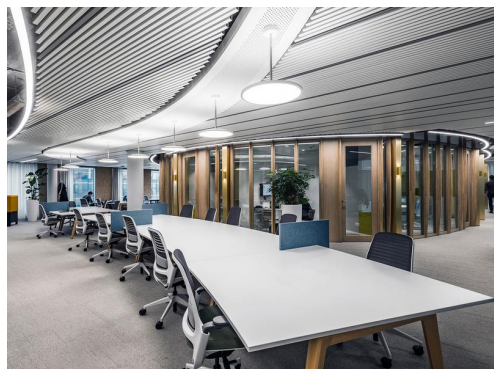

Strength 4: Ra>97, Bring More Real Color.



Diameter 1m Round Panel	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
3,094K	97.3	99	98	94	95	98	99	98	98	95	95	93	93	100	96	99

Except standard CRI>80, CRI (Ra) >97 optional for high end applications like shops and hospitals.

The higher "R" values are, the truer a luminaire can bring out the real colors of an object.

** "R" values have maximum of 100. Above table shows R1-R15 values of our round panel. All values are over 90, some even hits 100. **

Strength 5: Create an Interesting Space with Versatile Products.



Black Coating



Oval



Round Corner



Direct & Indirect light



Tunable White for HCL

Mix and match luminaires to your modern space in different colours, optics, shapes, sizes, and functions.

Strength 6: No Distance for Quality Control

Shanghai Cyanlite Technology Co., Ltd.
Quality Department



PSI Report Overview

PO No.	PO19-100216-20	Date	Jan. 17 th 2020	Report No.	FGC2020011709
PI No.	CYL20191119N05-06	Sales		Product	Round panel
Inspector	M. C.	Audit	F. F. Z.	Approved by	X. B. Z.

No.	Item No.	Order QTY	Inspection QTY	Result	Process if Failed			
				Pass	Fail	Concession	Redo	Hold
1	D11	100	20	Pass				
2	D12	100	20	Pass				
3	D11	100	20	Pass				
4	D12	100	20	Pass				
5	D11	100	20	Pass				
6	D12	100	20	Pass				
7	901	200	32	Pass				
8	902	300	50	Pass				
9	903	300	50	Pass				
10	904	500	50	Pass				
11								
12								
13								
14								
15								
16								
17								
18								
19								

Inspected to normal inspection general level II as MIL-STD-105E				
Total quantity	Sample size	Rejects allowed		
		Critical (CR) 0%	Major (MAJ) 1.5%	Minor (MI) 4.0%
51 ~ 90	13	0	1	1
91 ~ 150	20	0	1	1
151 ~ 280	32	0	1	2
281 ~ 500	50	0	1	2
501 ~ 1,200	80	0	2	4
1,201 ~ 3,200	125	0	2	5
3,201 ~ 10,000	200	0	3	8
Critical defects		Expected hazard of human life, health or environment		
Major defects		Usability or life time probably significant effected		
Minor defects		Usability or life time probably less or not effected		

Shanghai Cyanlite Technology Co., Ltd. Tel: +86 (21) 62499986
Add: No. 885, Sub-Lane 3, Lane 699, Nanliu Road, Pudong District, Shanghai, China. Zip code 201399.

Shanghai Cyanlite Technology Co., Ltd.
Quality Department



PSI Report

PO No.	PO19-100216	Date	Jan. 17 th 2020
PI No.	CYL20191119N05	Inspector	M. C.
Item No.	1	Per QTY	100
		Inspection QTY	20


Export box	Export box	Export box weight
Export box inside	Master box label	Gift box label
Product label	Inside the gift box	Visual Inspection
Driver	Test	Test

Shanghai Cyanlite Technology Co., Ltd. Tel: +86 (21) 62499986
Add: No. 885, Sub-Lane 3, Lane 699, Nanliu Road, Pudong District, Shanghai, China. Zip code 201399.

Shanghai Cyanlite Technology Co., Ltd.
Quality Department



PSI Report

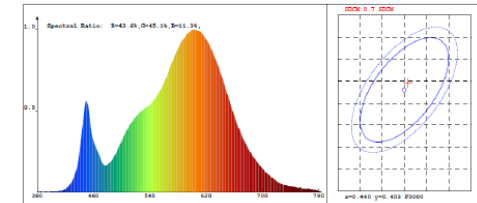

Rendering Index: Ra= 82.4
R1 -81 R2 -90 R3 -97 R4 -81 R5 -82 R6 -89 R7 -82 R8 -58
R9 -8 R10 -79 R11 -81 R12 -71 R13 -83 R14 -99 R15 -73

Photo Parameters
Flux: 2675.2lm Efficiency: 92.3lm/W Radiant: 7366.8mW Tv: 0.0msd


Ele. Parameters
Voltage: 0-230.300V Current: I=0.1300A
Power: P=28.98W Power Factor: PF=0.967

Lamp Parameters
Voltage: 0-230.300V Current: I=0.1300A Power: P=28.98W
Power Factor: PF=0.967 Efficiency: 0.81lm/W

Shanghai Cyanlite Technology Co., Ltd. Tel: +86 (21) 62499986
Add: No. 885, Sub-Lane 3, Lane 699, Nanliu Road, Pudong District, Shanghai, China. Zip code 201399.

Pre-shipment inspection (PSI) report will be provided to customer for each order, you know what you will have before receiving them.

Comparison 1: Key Process Control for a Uniform Light Surface.

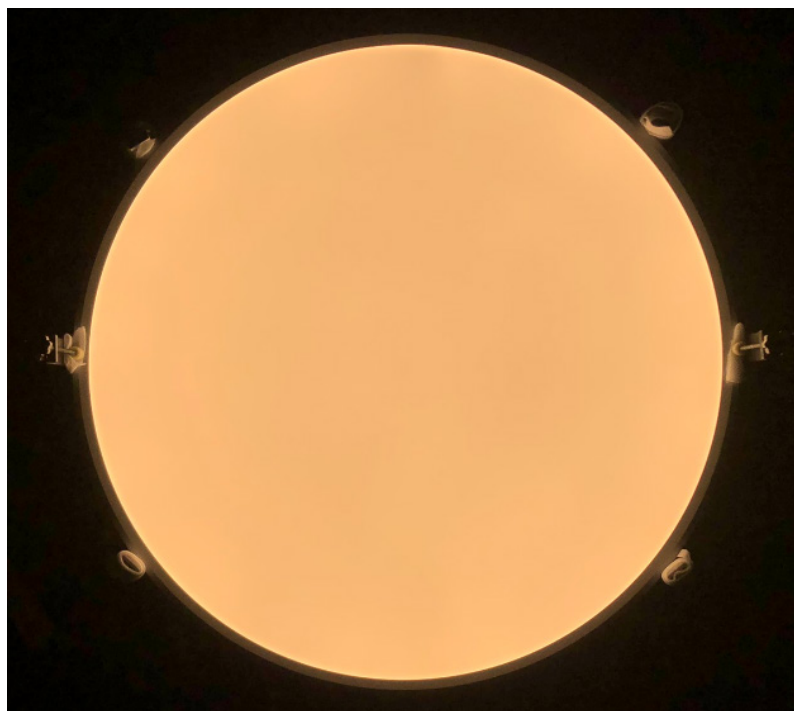

Cyanlite



Others

*Panel may have quality problems like light spot, black dirt, and so on, especially the big sizes panels.
Thanks to strict key process control, that problems won't happen on Cyanlite panels.*

Comparison 2: Tidy Wire with Chic



Cyanlite



Others

Tidy wires and no spare hole on the pendant disc with help of a combined DC cable and pendant wire.

Comparison 3: Solider Structure & Better UGR Control.



Cyanlite



Others


*Stay strong and solid with a frame of 20mm thickness.
Curved frame achieves a deeper light surface for better UGR control and friendly for human eyes.*

Comparison 4: Power Coated Backplate

- We Care the Details for You.



Cyanlite

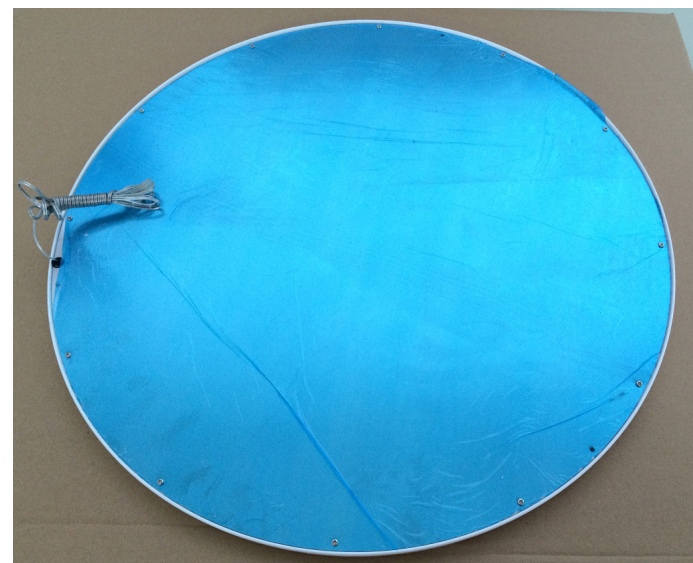

Others

*Cyanlite adopts 0.6mm backplate with powder coated, others <0.4mm bare steel.
Your brand looks more elegant with Cyanlite round panel, and no risk of getting rusty.*

Comparison 5: All-in Package; 360° Care



Cyanlite 



 **Others**

One-piece foam and all-in package give 360° care to the product and to clients for easy delivery, security on site, and quick unpacking.


SERVICES

Pre sales services

- ✓ OEM &ODM
- ✓ Customized Product Development
- ✓ Free Project Consultant
- ✓ Professional Light Planning
- ✓ Easy Communication
- ✓ Fast response and Quotation

After sales services

- ✓ Product Warranty
- ✓ Installation Guideline
- ✓ Customer Satisfaction Survey
- ✓ Complaint handling
- ✓ Onsite Support

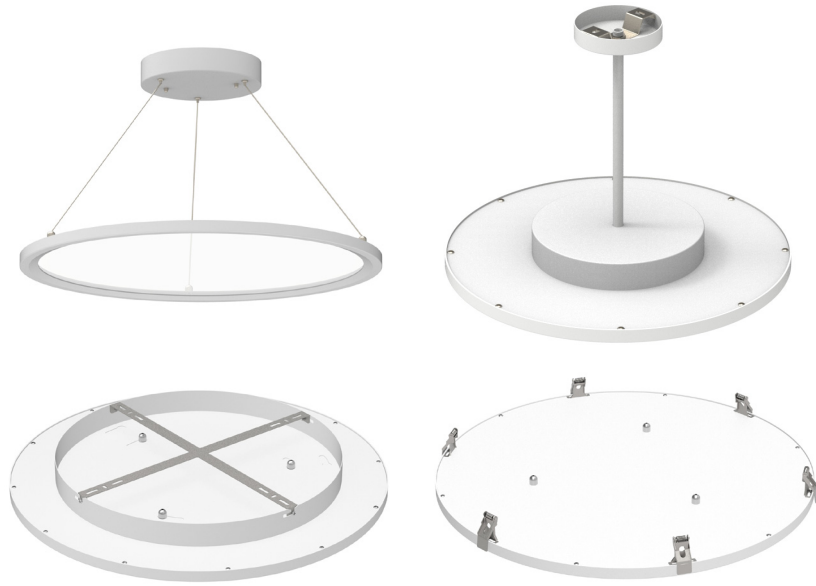


Cyanlite LED Round Panel Lights



Cyanlite™ LED Lighting Products For

- Lay-On
 - Lay-In
 - Cut-Out
 - Clip-In
 - Hook-In
 - Hook-Over
 - Hook-On
 - Double-Hook
- ## Ceilings

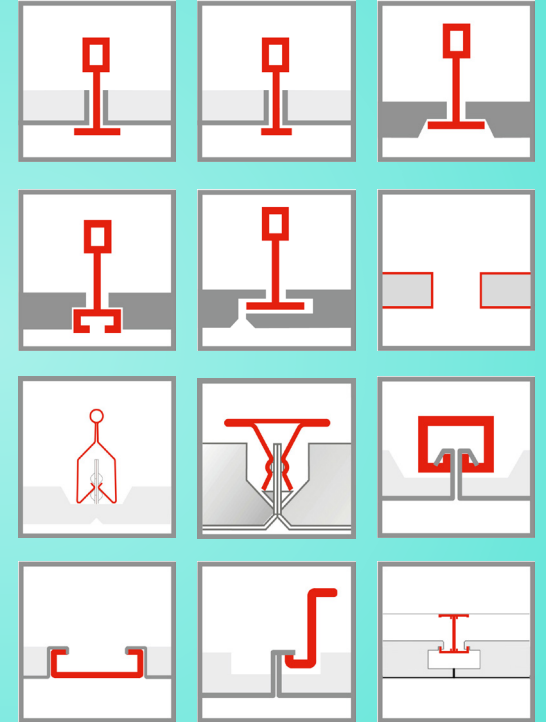

Thank you!

Questions are welcome!



Call us: +86 189 6463 6209
Email us: sales@cyanlite.com
Know us: www.cyanlite.com