

Overview

The Cyanlite™ T4 series LED Architectural troffer, delivering soft, high-quality light with excellent glare control UGR<19. With its flush-mount white housing, the T4 troffers blend seamlessly into any ceiling design and softly illuminate the space through highly diffused performance optics. The new architectural look suitable for applications such as corporate offices, up-market retail merchandising spaces and automotive retail applications.

Advantages

- Integrated reflector optics control, UGR<19
- Easy and fast installation, saving installation cost.
- Architectural design with even light distribution.
- Flexible and customization oriented, bespoke sizes are welcome.
- Professional LED lighting manufacturer, ODM for EU top lighting brands.


Features

- Standard sizes (mm): 595x595, 620x620, 295x1195, 595x1195
- RAL9016 as standard coating color, other RAL colors available on request
- System Efficiency upto 125 lm/W
- EN 12464-1& LG7 Compliant, UGR<19 as standard
- Range of color temperatures 3000K, 3500K, 4000K, 5000K & 6000K
- 5 Years Warranty
- Various dimming options, including 0-10V, DALI, Switch Dim etc.
- TPa/TPb options available

Specifications

Model	Part No.	System Power	Luminous Flux	Dimension (mm)
600x600	PB35W060P-T4	35W	4375 lm	595x595x35
625x625	PB35W062P-T4	35W	4375 lm	620x620x35
300x1200	PB35W312P-T4	35W	4375 lm	295x1195x35
600x1200	PB45W612P-T4	45W	5625 lm	595x1195x35

Photometric

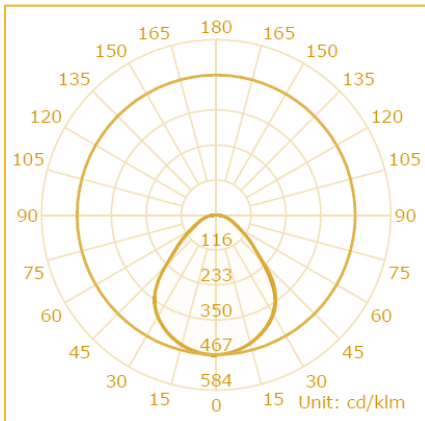

Dimensions (mm)

L	W	H
595	595	35
620	620	35
1195	295	35
1195	595	35

Technical Data



Efficacy	125lm/w \geq 4000K
CRI (Ra)	>80 / >90 Optional
Color Temp.	3000K/3500K/4000K/5000K/6000K
Lighting Method	Backlite
Light Source	SMD2835
SDCM	<3
Beam Angel	90°
Service Life	L80B10 > 50.000h (@25°C)
IP Rating	IP40 (IP54/IP65 Optional)
Impact Resistance	IK04
Hot Wire Resistance	650°C
Driver	Flicker Free On/off driver as standard
Dimmable	1-10V, DALI, Push Dim, Bluetooth Optional
Nominal Frequency	50/60Hz
Power Factor	>0.9
Input Voltage	200~240V
Flick Free	Yes
Housing Color	RAL9016 White
Housing Material	Aluminum frame, steel housing
Lens Material	Acrylic (PMMA)
Diffuser Material	Polystyrene (PS)
Storage Temp.	-40°C~+80°C
Working Temp.	-20°C~+45°C
Mount	Recessed/Surface Mounted
Package	2pcs per gift box, 3 pcs per master box
Warranty	5 years

According to the International Standard of LED luminaire, here Cyanlite formally claims this product is only allowed to be applied to indoor environment. Meanwhile Cyanlite promises full warranty for the products. Any severe environment application including high/low temperature, high humidity, high salinity, high ammonia etc. is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed. All values are typical values measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Rev: 1.1 2022/11/28