



Cyanlite™

FIT0



LED Retrofit Tube
for T5/T8/T10
Fluorescent Tubes

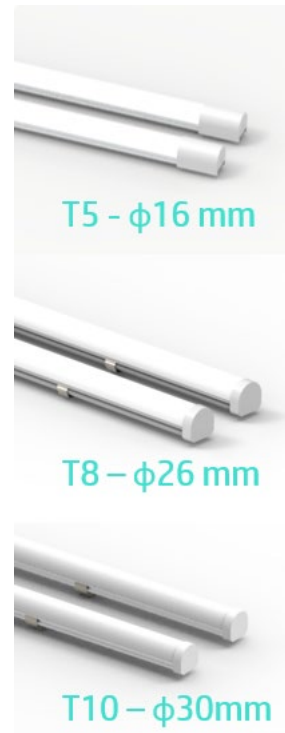

Recessed



Surface Mounted

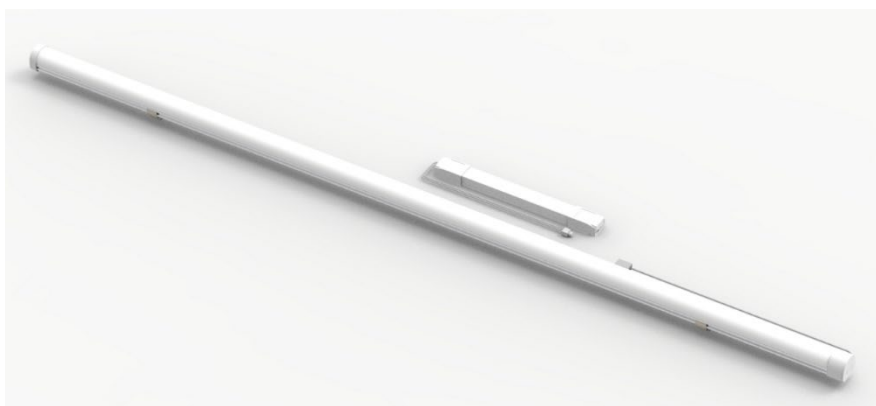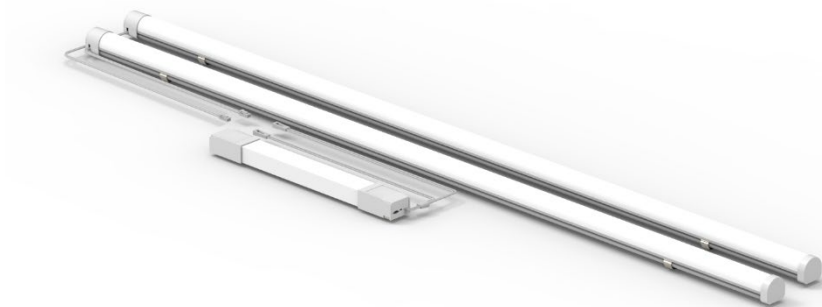

Overview

The Cyanlite FITO Retrofit LED Tube is an ideal replacement for traditional fluorescent T5/T8/T10 tubes. Its magnetic design allows for quick and easy installation. Additionally, the SELV external driver ensures safe usage, while offering various options for DALI dimming, 1-10V dimming, and TRIAC dimming. The product also features an optional SCCT version (3000K-3500K-4000K/3000K-4000K-6500K) and Power Adjustable function, making it more flexible for various applications and demands, and relieving stock pressure. The TWIN model that one driver supplies 2 tubes makes it more price competitive and easier for the retrofit. ENEC approved ensures 5 years warranty, long lifetime and high quality.

Advantage

- Aluminum housing ensures better heat management and longer lifetime.
- Isolated SELV external driver, meet all the safety requirements and standards.
- Twin Model: 1 driver supply 2 tubes to make it more price competitive for the product and installation.
- DALI dimming, 1-10V dimming, and TRIAC dimming optional.
- SCCT (Switchable CCT) and Power Adjustable for Multiple Lumen Output.
- Dual installation options with Magnetic and Screws.
- Patented Designed driver endcaps include the magnet, screw holes and strain relief.

Features

Certified as complete LED Luminaire (not just light source) by ENEC





3000K/4000K/6000K Color Switchable Optional



Neat Wiring design

- No need any re-wiring or bypass
- No need extra terminal box or driver plate
- Patented design driver endcap with strain relief for Zhaga standard linear driver

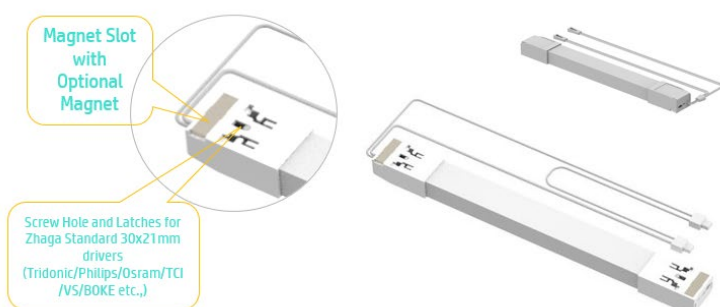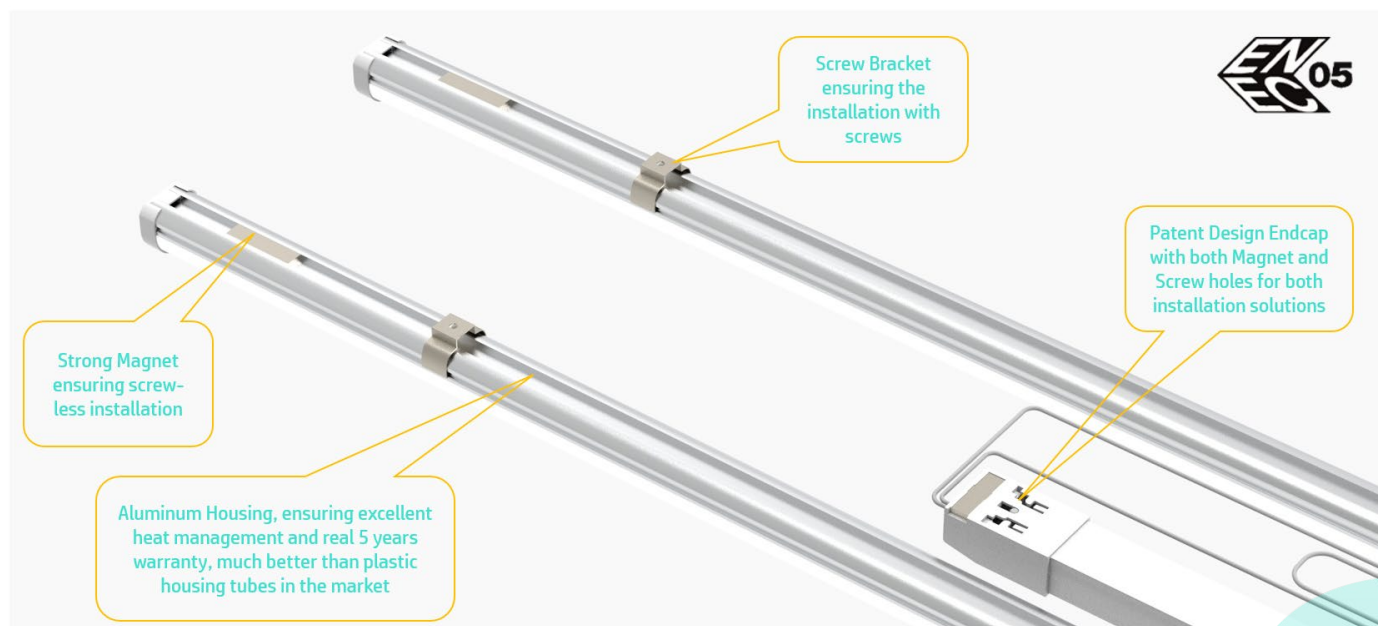

Single Model: 1 Driver for 1 Tube, Whole Set including LED Tube + Driver + Accessories


Model	Part No.	System Power	Lumen Output	Size	Power Adjustable
600	TB12W060x	12W	1900 lm	x=S ϕ 16x520 mm	400mA/500mA/600mA/700mA
		@400mA	@400mA	x=R ϕ 26x560 mm	12W/15W/18W/20W
		12-20W	1900-3200lm	x=H ϕ 30x560 mm	1900lm/2300lm/2900lm/3200lm
900	TB18W090x	18W	2900 lm	x=S ϕ 16x820 mm	400mA/500mA/600mA/700mA
		@600mA	@600mA	x=R ϕ 26x860 mm	12W/15W/18W/20W
		12-20W	1900-3200lm	x=H ϕ 30x860 mm	1900lm/2300lm/2900lm/3200lm
1200	TB23W120x	23W	3700 lm	x=S ϕ 16x1120 mm	700mA/850mA/900mA/1050mA
		@850mA	@850mA	x=R ϕ 26x1160 mm	20W/23W/26W/30W
		20-30W	3200-4800lm	x=H ϕ 30x1160 mm	3200lm/3700lm/4150lm/4800lm
1500	TB36W150x	36W	6000 lm	x=S ϕ 16x1420 mm	1100mA/1200mA/1300mA/1400mA
		@1200mA	@1200mA	x=R ϕ 26x1460 mm	33W/36W/39W/42W
		33-42W	5200-7000lm	x=H ϕ 30x1460 mm	5200lm/6000lm/6500lm/7000lm

Twin Model: 1 Driver for 2 Tubes, Whole Set including 2xLED Tube +1x Driver + Accessories

Model	Part No.	System Power	Lumen Output	Size	Power Adjustable
600	TB12W060x-X2	12W x2	1900 lm x2	x=S ϕ 16x520 mm	400mA/500mA/600mA/700mA
		@400mA	@400mA	x=R ϕ 26x560 mm	12W/15W/18W/20W x2
		12-20W x2	1900-3200lm x2	x=H ϕ 30x560 mm	1900lm/2300lm/2900lm/3200lm x2
900	TB18W090x-X2	18W x2	2900 lm x2	x=S ϕ 16x820 mm	400mA/500mA/600mA/700mA
		@600mA	@600mA	x=R ϕ 26x860 mm	12W/15W/18W/20W x2
		12-20W x2	1900-3200lm x2	x=H ϕ 30x860 mm	1900lm/2300lm/2900lm/3200lm x2
1200	TB23W120x-X2	23W x2	3700 lm x2	x=S ϕ 16x1120 mm	700mA/850mA/900mA/1050mA
		@850mA	@850mA	x=R ϕ 26x1160 mm	20W/23W/26W/30W x2
		20-30W x2	3200-4800lm x2	x=H ϕ 30x1160 mm	3200lm/3700lm/4150lm/4800lm x2
1500	TB36W150x-X2	36W x2	6000 lm x2	x=S ϕ 16x1420 mm	1100mA/1200mA/1300mA/1400mA
		@1200mA	@1200mA	x=R ϕ 26x1460 mm	33W/36W/39W/42W x2
		33-42W x2	5200-7000lm x2	x=H ϕ 30x1460 mm	5200lm/6000lm/6500lm/7000lm x2


Triple Model (1 driver for 3 tubes) and **Quadra Model** (1 driver for 4 tubes) are all available, please contact Cyanlite for more details.

Photometric



- Beam: 120°

Dimensions

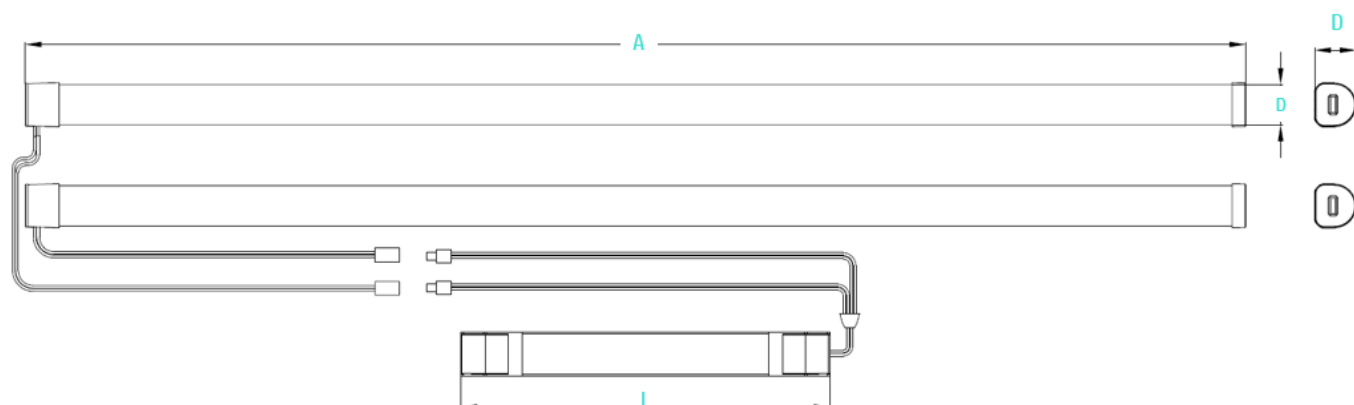


Cyanlite Type	Model	A	D	L(*)
T5	600 mm	520 mm	16 mm	216 mm
	900 mm	820 mm	16 mm	216 mm
	1200 mm	1120 mm	16 mm	266 mm
	1500 mm	1420 mm	16 mm	316 mm
T8	600 mm	560 mm	26 mm	216 mm
	900 mm	860 mm	26 mm	216 mm
	1200 mm	1160 mm	26 mm	266 mm
	1500 mm	1460 mm	26 mm	316 mm
T10	600 mm	560 mm	30 mm	216 mm
	900 mm	860 mm	30 mm	216 mm
	1200 mm	1160 mm	30 mm	266 mm
	1500 mm	1460 mm	30 mm	316 mm


(*) L depends on different driver brand and model used, default driver is Tridonic SNC4 series, with endcap 36mm extra than driver

Accessories


- 1) Magnets and Screw Brackets are included in the standard package.

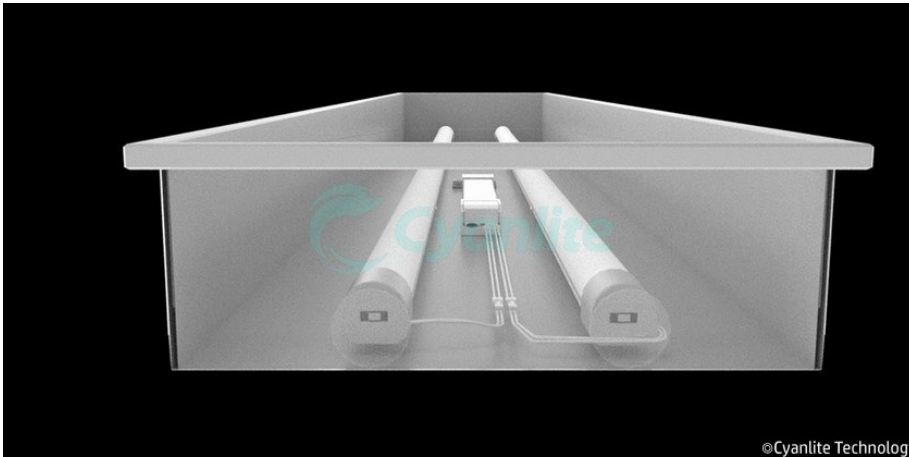







- 2) Optional Height Adjustable Bracket, for the existing luminaire bottom is flat but with obstacles

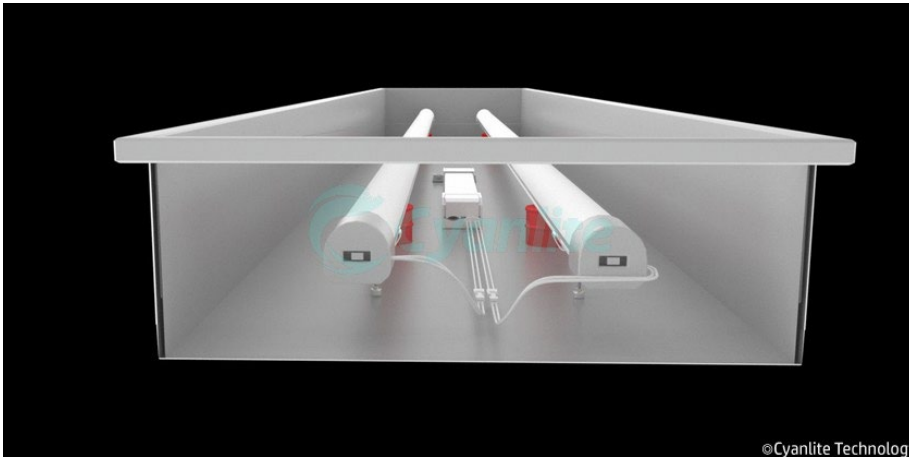

- 3) Optional G13 lamp holder adaptor, for the existing luminaire has reflectors on the bottom

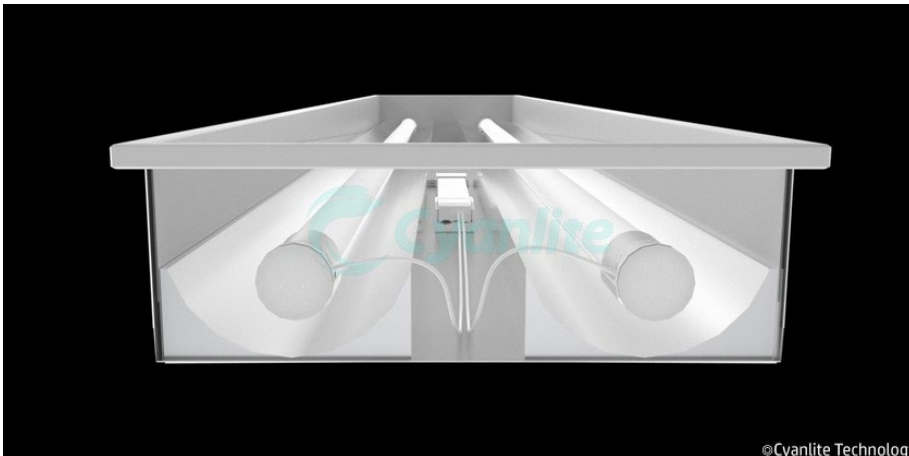

*Please scan the QR-Code to see the installation videos on YouTube.

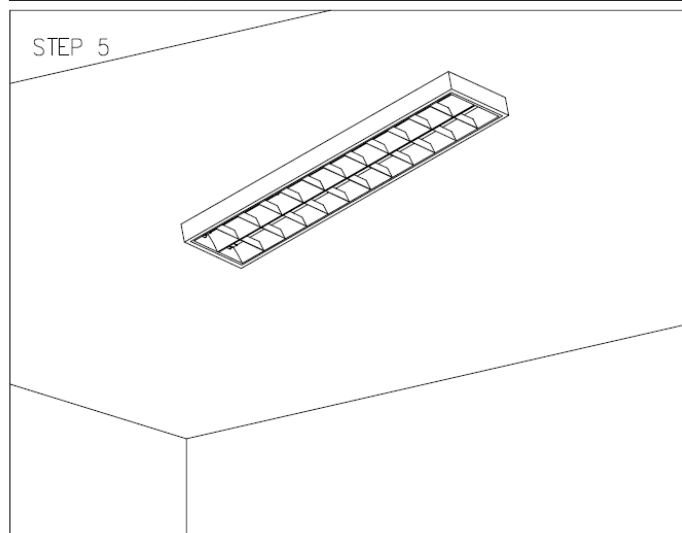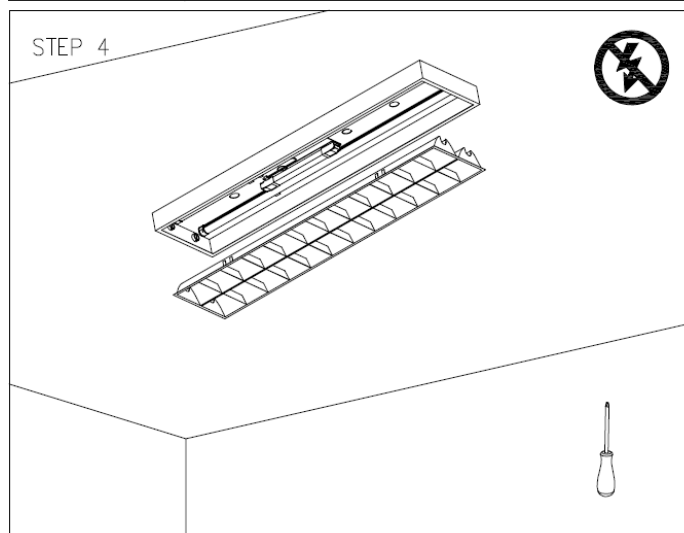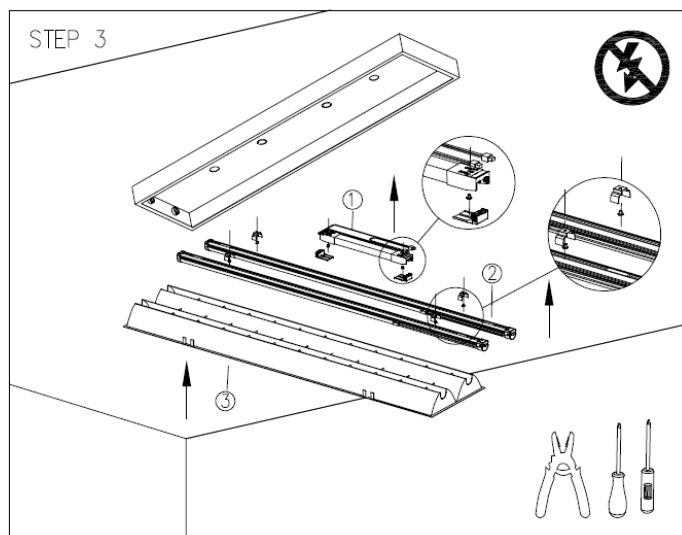
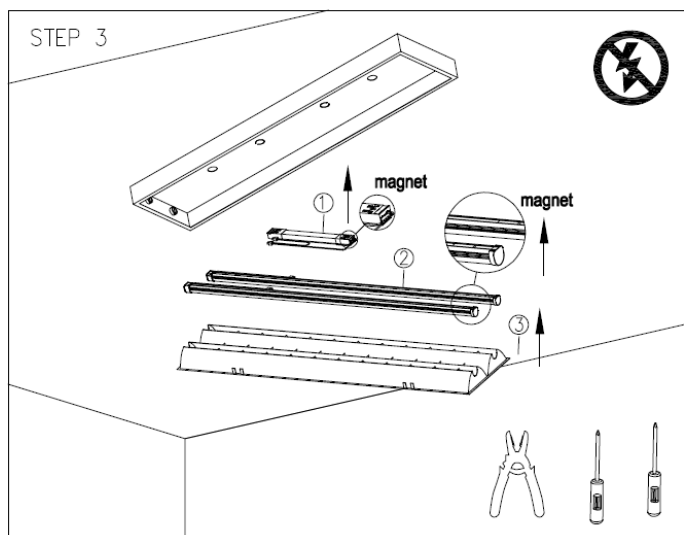
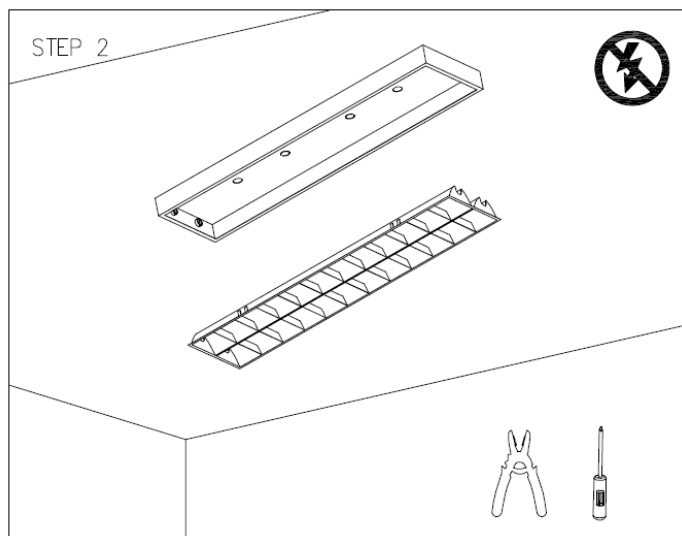
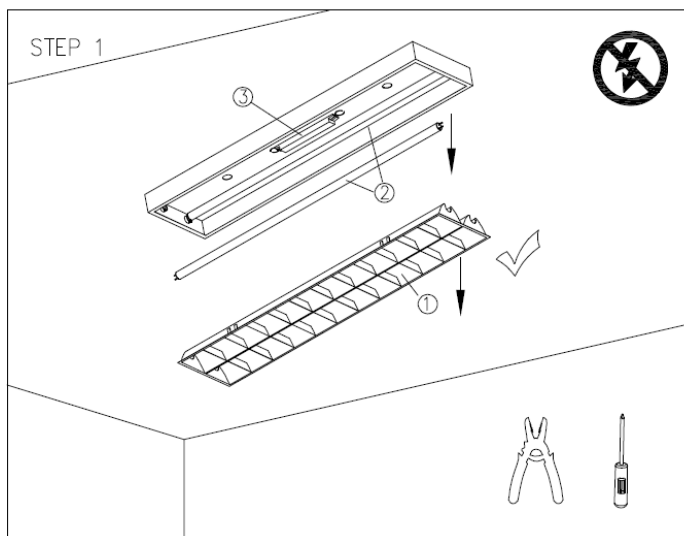


- 1, Power Off and take out the reflector and remove existing fluorescent tubes.
- 2, Remove the existing ballast and wires for neat installation. Or Just keep everything there for quick installation.
- 3, Stick the tubes and driver directly to the housing by Magnets. Or Install the tubes and driver to the housing by Screws.
- 4, Connecting the AC to the driver and plug the DC connector from driver to tubes.
- 5, Install the reflector back to fitting, job done!

System Efficiency	Upto 170lm/w @ 4000K Ra80;
CRI (Ra)	>80 (>90 optional)
Color Temp.	3000K/4000K/5000K/6500K (Single CCT) ; 3000K-3500K-4000K 3000K-4000K-6500K SCCT (Switchable CCT)
Class	Class I (System); Class III (Tube/luminaire)
Light Source	SMD2835 LED
SDCM	<3
Beam Angel	120°
Service Life	L80B10 (Ta25°C) > 50.000h
IP Rating	IP40
Impact Resistance	IK04
Hot Wire Resistance	850°C
Driver	SELV Flicker Free On/off driver as standard
Dimmable	1-10V, DALI, Push Dim, Bluetooth Optional
Nominal Frequency	50/60Hz
Power Factor	>0.9
Input Voltage	200~240V
Flick Free	Yes
Housing Material	Aluminum Housing
Diffuser Material	Polycarbonate (PC)
Storage Temp.	-40°C~+80°C
Working Temp.	-20°C~+45°C
Mount	Recessed/Lay-On/Surface Mounted
Warranty	5 years

According to the International Standard of LED luminaire, here Cyanlite formally claims this product is only allowed to be applied to indoor environment. Meanwhile Cyanlite promises full warranty for the products. Any severe environment application including high/low temperature, high humidity, high salinity, high ammonia etc. is not permitted without the official confirmation from the manufacturer. If any misapplication happens, the warranty policy is no longer guaranteed. All values are typical values measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Rev: 1.6 2025/12/20



Cyanlite™

LED Luminaires

For

- Recessed
- Surface Mounted
- Suspended
- Wall Mounted
- Standing & Desktop
- Installations

www.cyanlite.com

